# **Open Type Trimmer**

# Model 38



#### Features:

- 10 mm single turn
- Dust proof
- Carbon element
- Low TCR
- RoHS compliant





# **Model Styles Available**

Top Adjust	38P
Side Adjust	38W

## **Electrical**

Resistance Range	100 to 1,000,000 Ohms
Standard Resistance Tolerance	± 30%, (±20% and ±10% available)
Input Voltage, Maximum	200 Vdc
Power rating, Watts	Linear :0.15W, others : 0.07W, at 50 ℃
End Resistance, Maximum	2 ohms or 0.5% whichever is greater
Actual Electrical Travel	220°±20°
Insulation Resistance, Minimum	100 Megohms
Resolution	Essentially infinite
Contact Resistance Variation	5% Max.
Temperature Coefficient of Resistance	±500 ppm/°C

# Mechanical

Torque, Maximum	1.5 in - oz.
Wiper Position	Approx. 50%

Issue 3 12/2023 Page 1

# **Open Type Trimmer**


## Model 38




# Environmental Operating Temperature Range -25 °C to +70 °C Rotational Life, 500 Cycles ±3% ΔR Load Life, 0.15W, 100 Hours, 50 °C ±5% ΔR Resistance to Solder Heat 260 °C for 3 sec. Aqueous cleaning not recommended

# Ordering Information 38 W L A B R100K LF 30 Tolerance: 10 - ±10% 20 - ±20% 30 - ±30% Rotor Options ( see below ) RoHS Compliant Product Code Total Resistance PCB Layout ( see below ) Std. Package 500 pc/bag Taper : A,B,C ( see below )


#### **Rotor Options**

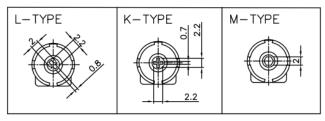



#### **PCB Layout Options**

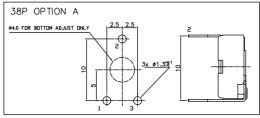

#### **Taper Options**

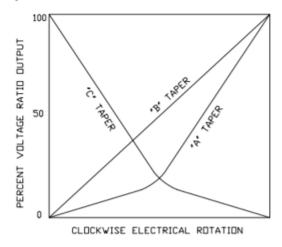






# **Open Type Trimmer**

Model 38




# **Outline Drawings**

#### Model 38P (Top Adjust)

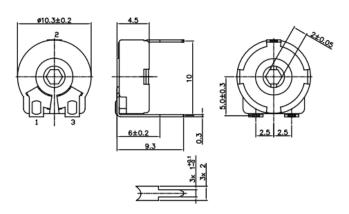

#### Model 38W (Side Adjust)

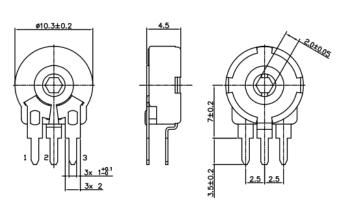

# **Circuit Diagram**

# **Standard Resistance Values, Ohms**

100 500 1K 2K 5K 10K 20K 50K 100K 200K 500K 1MEG