


Model 400 Series

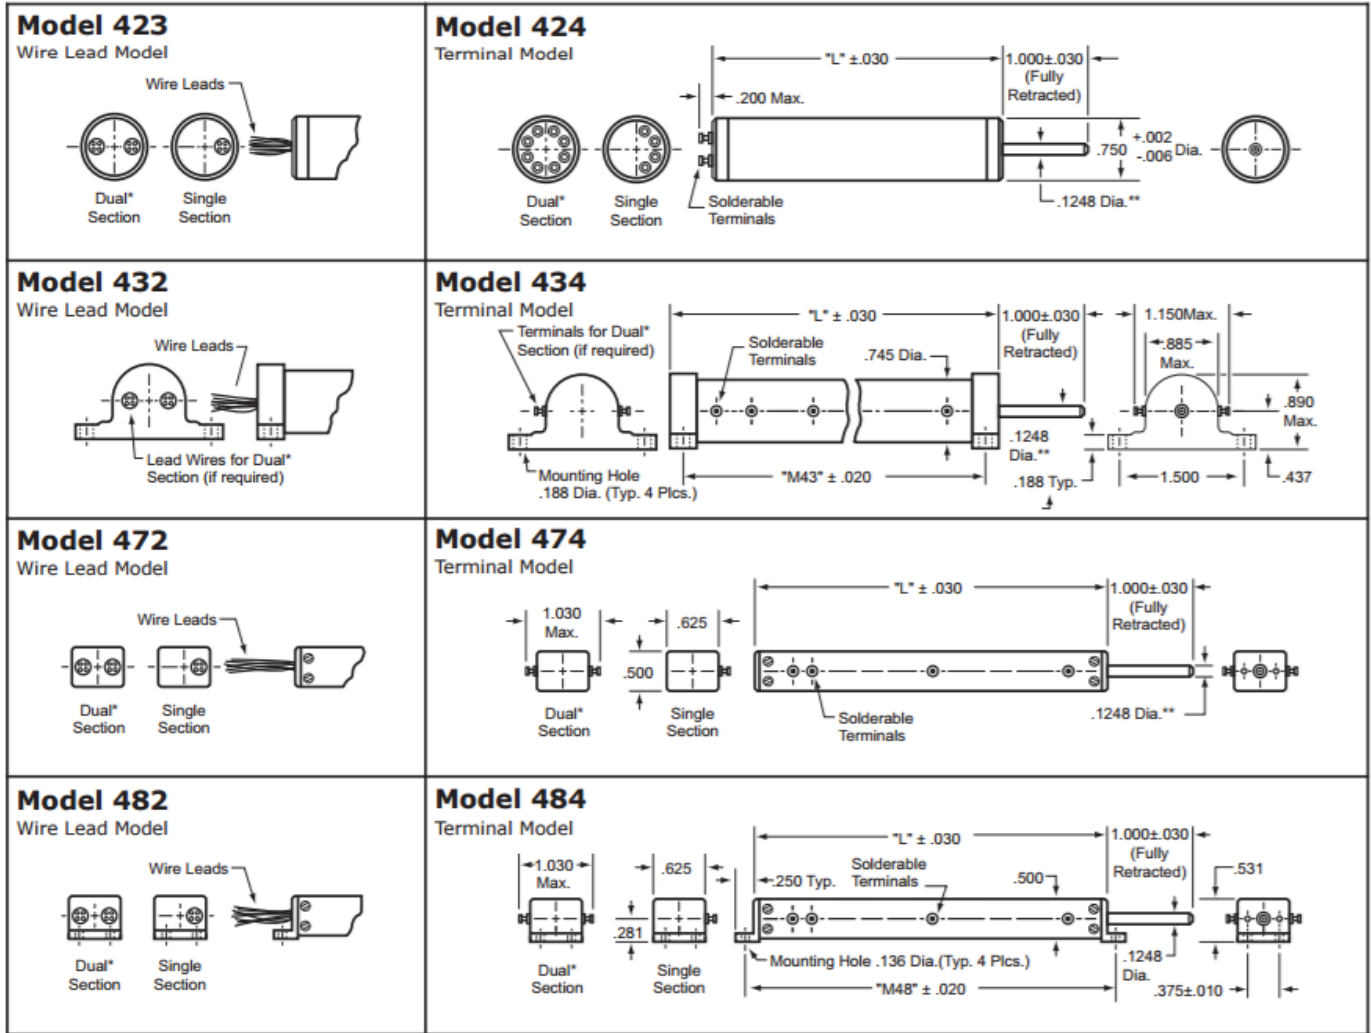

Model Number	Elect. Travel Inch±0.015	Mech. Travel Inch±0.030	Dim "L" Inch±0.030	Dim "M43" Inch±0.020	Dim "M48" Inch±0.020
4XX-050	0.500	0.560	1.500	1.188	1.750
4XX-100	1.000	1.060	2.000	1.688	2.250
4XX-200	2.000	2.060	3.000	2.688	3.250
4XX-300	3.000	3.060	4.000	3.688	4.250
4XX-400	4.000	4.100	5.000	4.688	5.250
4XX-500	5.000	5.100	6.000	5.688	6.250
4XX-600	6.000	6.100	7.000	6.688	7.250

Notes:

- * Dual sections and Center Tap are available on special order only
- ** Diameter is 0.1248" +0.0000" / -0.0003"

Unspecified tolerances are ±0.005"
 Dimensions for "Wire Lead" models are the same as "Terminal" models except as indicated.
 Housings, brackets, and caps are anodized aluminum.
 Wire leads are #26 wire, 12 inch minimum length, meets MIL-C-16878C.
 Shafts are stainless steel, chamfer is 0.015" x 45°.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.