


BCN Series

Features

- Sulphur resistant version available (Tested to ASTM-B809)
- AEC-Q200 (BCN10 and BCN164AB)
- Convex terminations
- Isolated and bussed versions



All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

Summary of Types

| Туре | Part Number Start | Width (mm) | Resistor Elements | Circuit | Package Size | Scalloped Convex | Square Convex |
|--------|----------------------|------------|----------------------|-----------------------------------|--------------|---------------------|------------------|
| BCN10 | BCN104AB | 1.0 | 0402 x 4 | | 0804 | | |
| BCN164 | BCN164A | | 0603 x 4 | 0603 x 4 Isolated 0603 x 8 Bussed | 1005 | | |
| | BCN164AB | 1.6 | | | | | |
| BCN168 | BCN168SB | 1.0 | | | | | |
| | BCN168RB | | | | | | |


Electrical Data

| | | BCN10 | BCN164 | BCN168 | | |
|-----------------------------|--------|--|--------|------------|--|--|
| Resistor power rating @70°C | mW | 6 | 32 | | | |
| Package power rating @70°C | mW | | | | | |
| Limiting element voltage | V | 25 | 50 | 25 | | |
| Maximum overload voltage | V | 63 | 125 | 63 | | |
| Resistance range | ohms | 10R – 1M0 | | 100R – 1M0 | | |
| Resistance tolerance | % | 1, 5 | | 5 | | |
| TCR | ppm/°C | ±200 | | | | |
| Standard values | | E24 (for 5% tolerance), E96 (for 1% tolerance) | | | | |
| Ambient temperature range | °C | -55 to +155 | | | | |



BCN Series

Circuits

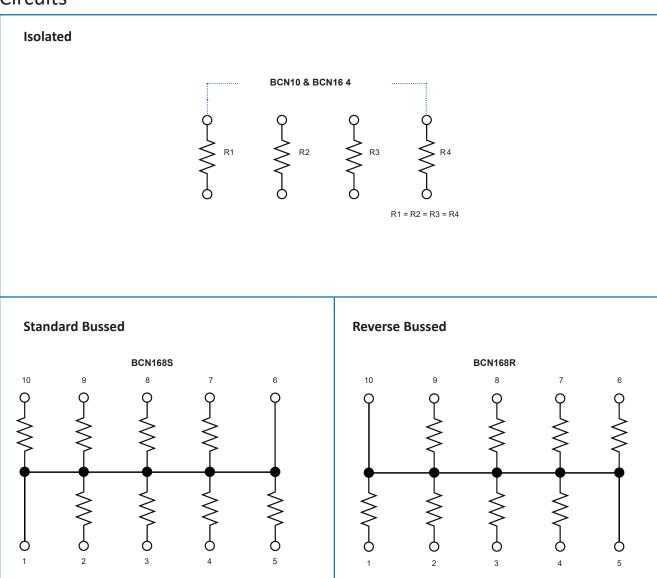

Environmental Data


| Test | Condition | ΔR% (+0.1Ω) | |
|---------------------------------|--|-------------|--|
| Load life | 1000 hrs cyclic load @ 70°C | 3 | |
| Short term overload | 2.5 x rated voltage for 5s | 2 | |
| High temperature operation | 1000 hrs @ 155°C | 3 | |
| Temperature cycling | 5 cycles, -55 to +155°C | 1 | |
| Moisture resistance | 1000 hrs @ 40°C, 95% RH | 3 | |
| Resistance to solder heat | 260°C for 10s | 1 | |
| Sulphur resistance ¹ | 1000 hrs @ 50°C, 92% RH, 3-5ppm H ₂ S | 0.5 | |


Note 1- Anti-sulphur construction only



BCN Series

Physical Data (Inch /mm)

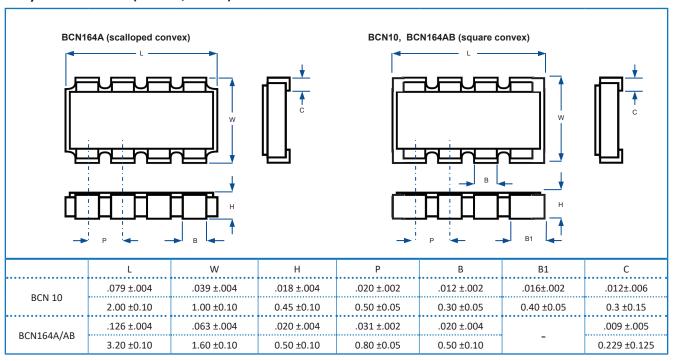


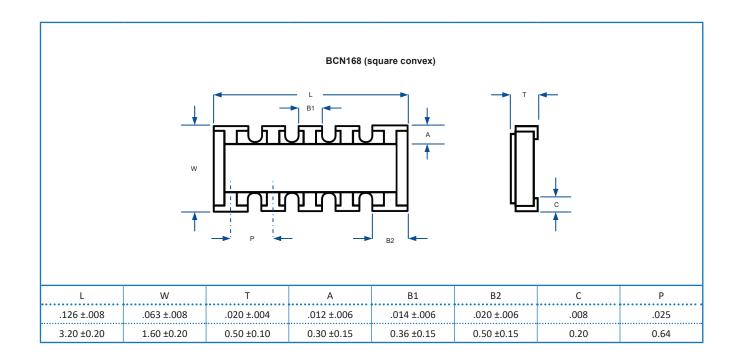




BCN Series

Solder pad layout (Inch / mm)

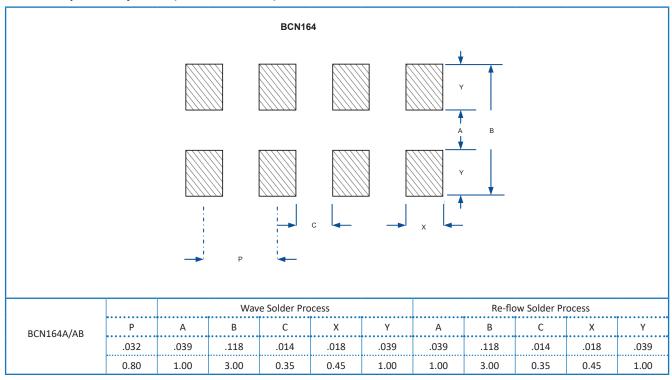


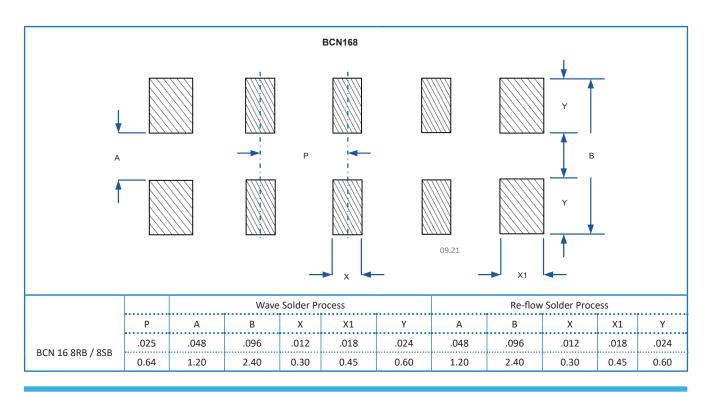




BCN Series

Solder pad layout (Inch / mm)

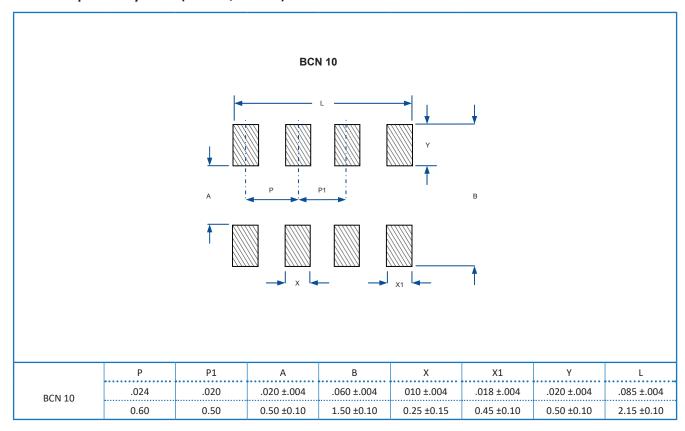

Construction

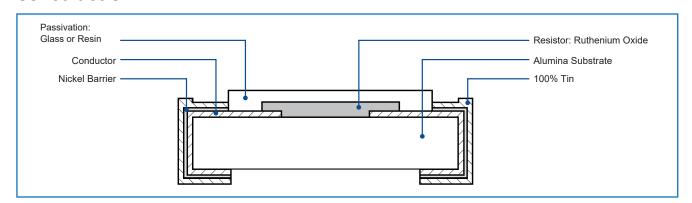

Marking


BCN parts may be unmarked or marked with ohmic values. If marked, 5% tolerance parts are marked with three characters (e.g. 102). 1% tolerance parts may be marked with 3 or 4 characters (e.g. 102, 1001, 4991)



BCN Series

Ordering Procedure

Example: BCN164AB102J7S (BCN 1.6mm wide, 4 resistors, isolated circuit, square edge, convex terminations at 1 kilohm ±5%, on a 7" reel, anti-sulphur construction, Pb-free).



| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|--------|----------|------------------------|---------------------|-----------|---|------------|----------------------|----------------|
| Series | Width | Number of Resistors | Circuit | Edge | Value | Tolerance | Packaging | Construction |
| BCN | 10=1.0mm | 4 | A=Isolated | Blank= | 3 digits for E24 | F=±1% | 7=7" reel (standard) | Blank= |
| | 16=1.6mm | 8 | S=Standard | Scalloped | at 5% | J=±5% | 13=13" reel | Standard |
| | | | bussed | B=Square | 4 digits for | (Blank for | | S=Anti-sulphur |
| | | | R=Reverse bussed | | uniquely E96 and for all values at 1% | jumper) | | |
| | | | | | JP=Jumper | | | |

| Valid Options (1 - 5) | Valid Options (6 & 9) | Packaging Quantity & Tape (8) | |
|-----------------------|---|---|--|
| B C N 1 0 4 A B | JP=Jumper, S=Anti-sulphur (5% tolerance & 7" reel only) | 7=10,000/reel, 13=40,000/reel, Paper tape | |
| B C N 1 6 4 A | JP=Jumper, S=Anti-sulphur (1% tolerance & 7" reel only) | | |
| B C N 1 6 4 A B | JP=Jumper, S=Anti-sulphur | 7 5000/ 140 20 000/ 15 | |
| B C N 1 6 8 S B | | 7=5000/reel, 13=20,000/reel, Paper tape | |
| B C N 1 6 8 R B | S=Anti-sulphur (7" reel only) | | |