

SILICON MULTI-EPITAXIAL NPN TRANSISTOR

BUV20

- Hermetic TO3 (TO-204AE) Metal Package
- High Voltage, High Current, Fast Switching
- Suited For High Current Switching Industrial Applications
- High Reliability Screening Options Available



ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

V_{CBO}	Collector – Base Voltage		160V
V_{CER}	Collector – Emitter Voltage	$R_{BE} = 100\Omega$	150V
V_{CEX}	Collector – Emitter Voltage	$V_{BE} = -1.5V$	160V
V_{CEO}	Collector – Emitter Voltage		125V
V_{EBO}	Emitter – Base Voltage		7V
I_C	Collector Current – Continuous		50A
I_{CM}	Peak Collector Current	$t_p = 10\text{ms}$	60A
I_B	Base Current		10A
P_D	Total Power Dissipation at	$T_C = 25^\circ\text{C}$	250W
		Derate Above 25°C	$1.43\text{W}/^\circ\text{C}$
T_J	Junction Temperature		$+200^\circ\text{C}$
T_{stg}	Storage Temperature Range		-65 to $+200^\circ\text{C}$

THERMAL PROPERTIES

Symbols	Parameters	Max.	Units
$R_{\theta JC}$	Thermal Resistance, Junction To Case	0.7	$^\circ\text{C}/\text{W}$

Semelab Limited reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Semelab

Semelab Limited

Coventry Road, Lutterworth, Leicestershire, LE17 4JB

Document Number: 11527

Telephone: +44 (0) 1455 556565
Fax: +44 (0) 1455 552612

Email: sales@semelab-tt.com

Website: <http://www.semelab-tt.com>

Issue: 1
Page: 1 of 3

SILICON MULTI-EPITAXIAL NPN TRANSISTOR BUV20

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

Symbols	Parameters	Test Conditions	Min.	Typ	Max.	Units
$V_{(BR)CEO}^{(1)}$	Collector-Emitter Breakdown Voltage	$I_C = 20\text{mA}$ $I_B = 0$	125			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E = 1.0\text{mA}$ $I_C = 0$	7			
I_{CEO}	Collector Cut-Off Current	$V_{CE} = 100\text{V}$ $I_B = 0$			3	mA
I_{CEX}	Collector Cut-Off Current	$V_{CE} = 160\text{V}$ $V_{BE} = -1.5\text{V}$			3	
		$T_C = 125^\circ\text{C}$			12	
I_{EBO}	Emitter Cut-Off Current	$V_{EB} = 5\text{V}$ $I_C = 0$			1.0	
$h_{FE}^{(1)}$	Forward-current transfer ratio	$V_{CE} = 2\text{V}$ $I_C = 25\text{A}$	20		60	
		$V_{CE} = 4\text{V}$ $I_C = 50\text{A}$	10			
$V_{CE(sat)}^{(1)}$	Collector-Emitter Saturation Voltage	$I_C = 25\text{A}$ $I_B = 2.5\text{A}$		0.3	0.6	V
		$I_C = 50\text{A}$ $I_B = 5\text{A}$		0.7	1.2	
$V_{BE(sat)}^{(1)}$	Base-Emitter Saturation Voltage	$I_C = 50\text{A}$ $I_B = 5\text{A}$		1.4	2	

DYNAMIC CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

Symbols	Parameters	Test Conditions	Min.	Typ	Max.	Units
f_T	Transition Frequency	$I_C = 2\text{A}$ $V_{CE} = 15\text{V}$ $f = 4\text{MHz}$	8			MHz
t_{on}	Turn-On Time	$I_C = 50\text{A}$ $V_{CC} = 30\text{V}$ $I_{B1} = 5\text{A}$			1.5	μs
t_s	Storage Time	$I_C = 50\text{A}$ $V_{CC} = 30\text{V}$			1.2	
t_f	Fall Time	$I_{B1} = -I_{B2} = 5\text{A}$			0.3	


Notes

(1) Pulse Width $\leq 380\mu\text{s}$, $\delta \leq 2\%$

SILICON MULTI-EPITAXIAL NPN TRANSISTOR BUV20

MECHANICAL DATA

Dimensions in mm (inches)

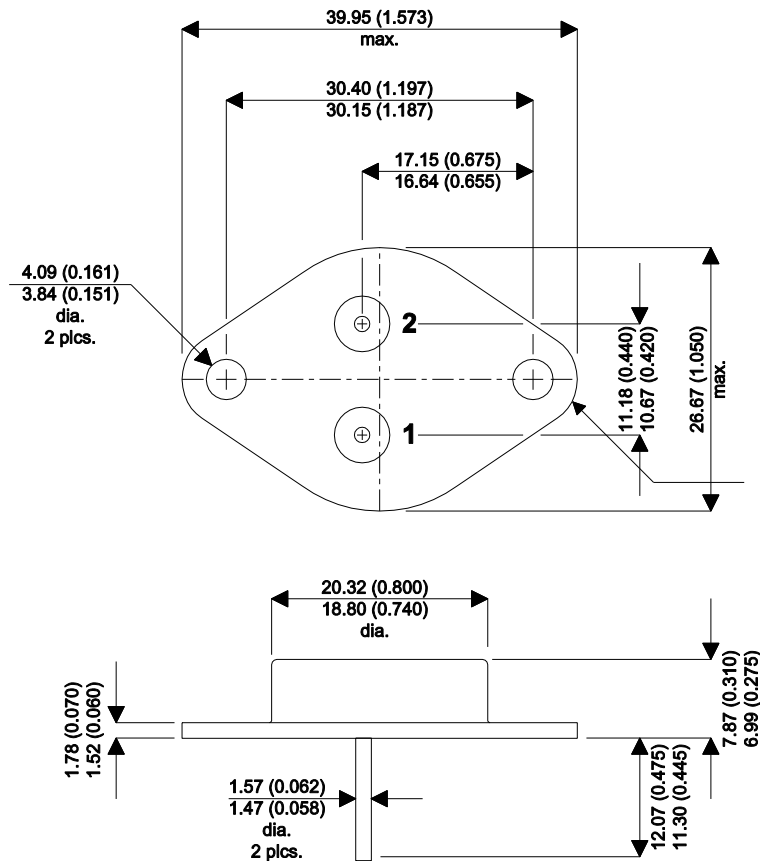

TO3 (TO-204AE) METAL PACKAGE
Underside View

Pin 1 - Base

Pin 2 - Emitter

Case - Collector

PART NUMBER VARIANTS

Part Number Reference	Termination Finish
BUV20	Standard Finish – Pre-tinned 63% Tin, 37% Lead
BUV20.R	Lead Free Finish – Pre-tinned 96.5% Tin, 3% Silver, 0.5% Copper (SAC305)

Notes:

- Specify lead finish option by part number at point of order
- All design variants contain Lead (Pb) within the construction of the device. The Lead content is fully RoHS compliant but using an exemption as currently understood from the EU directive 2011/65/EU (Annex III, exemption 7a).