

Fiber Optic GaAlAs LED

OPF320, OPF340 Series



Features:

- Low Cost 850 nm LED technology
- Electrically isolated metal cap package
- High thermal stability
- High optical coupling efficiency to multimode optical fiber
- Industrial temperature range
- Subjected to 100% Burn-in for 96 Hrs at 25° C at 100 mA

Description:

The OPF320 and OPF340 series fiber optic transmitters are high performance devices packaged for data communication links. This transmitter is an 850 nm GaAlAs LED and is specifically designed to efficiently launch optical power into fibers ranging in size from 50/125 μm up to 200/230 μm diameter fiber. Multiple power ranges with upper and lower limits are offered, which allows the designer to select a device best suited for the application.

This product's combination of features including high speed and efficient coupled power makes it an ideal transmitter for integration into all types of data communications equipment.

Applications:

- Industrial Ethernet equipment
- Copper-to-fiber media conversion
- Intra-system fiber optic links
- Video surveillance systems

Typical Coupled Power $I_F = 100 \text{ mA}, 25^\circ \text{ C}$					
Fiber Size	Type	N.A.	OPF320A	OPF320B	OPF340A
50/125 μm	Graded Index	0.20	19 μW	12.5 μW	25 μW
62.5/125 μm	Graded Index	0.28	34 μW	22 μW	45 μW
100/140 μm	Graded Index	0.29	95 μW	62 μW	125 μW
200/230 μm	Step Index	0.41	360 μW	235 μW	475 μW




RoHS

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Mechanical Data

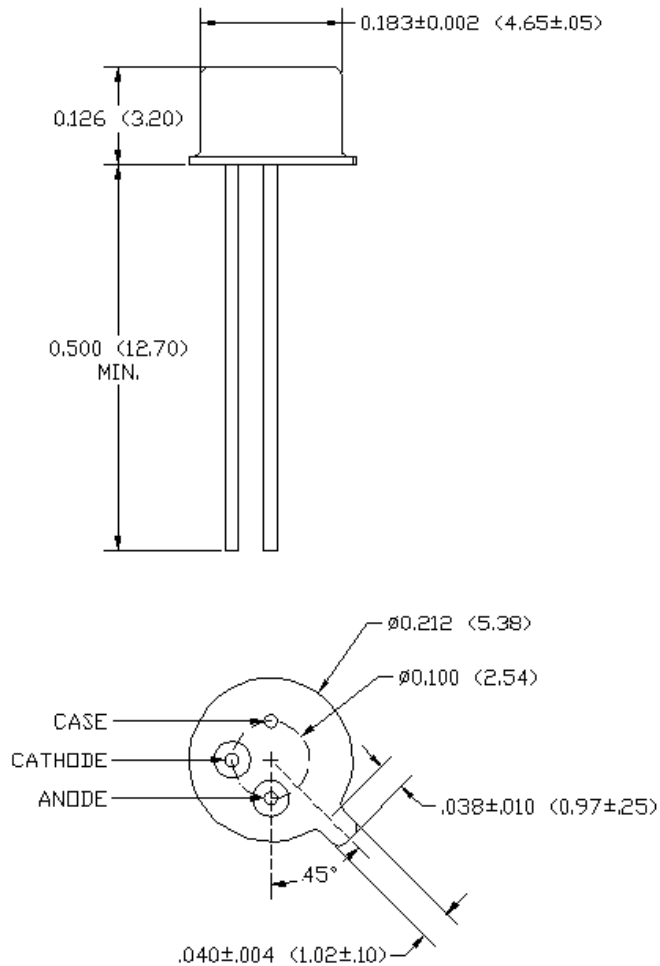

DIMENSIONS ARE IN INCHES (MILLIMETERS)

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Electrical Specifications

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Storage Temperature Range	-55° C to +150° C
Operating Temperature Range	-40° C to +125° C
Lead Soldering Temperature ⁽¹⁾	260° C
Continuous Forward Current ⁽²⁾	100 mA
Maximum Reverse Voltage	1.0 V

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
P_O	Radiant Power Output: OPF320A OPF320B OPF340A	15 10 20	19.0 12.5 25	-	μW	$I_F = 100\text{ mA}$, 50/125 μm cable, N.A. = 0.20
V_F	Forward Voltage	-	1.8	2.0	V	$I_F = 100\text{ mA}$
λ_p	Peak Output Wavelength	830	850	870	nm	$I_F = 50\text{ mA}$
B	Spectral Bandwidth Between Half Power Points	-	35	-	nm	$I_F = 50\text{ mA}$
t_r, t_f ⁽⁴⁾	Rise and Fall Time	-	6.0	10.0	ns	$I_F = 100\text{ mA}$, 10% to 90%

Notes:



- (1) Maximum of 5 seconds with soldering iron, 1/16 inch (1.6 mm) from case. Duration can be extended to 10 seconds when flow soldering. RMA flux is recommended.
- (2) Derate linearly 0.80 mA/° C above 25° C.
- (3) To convert radiant power output to dBm, use the following expression $\text{dBm} = 10 \log (\mu\text{W}/1000)$.
- (4) No Pre-bias.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com

Typical Performance

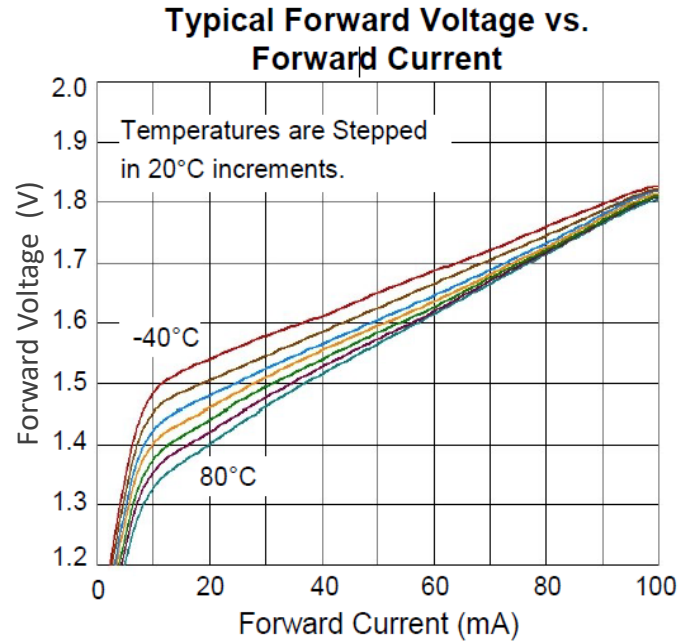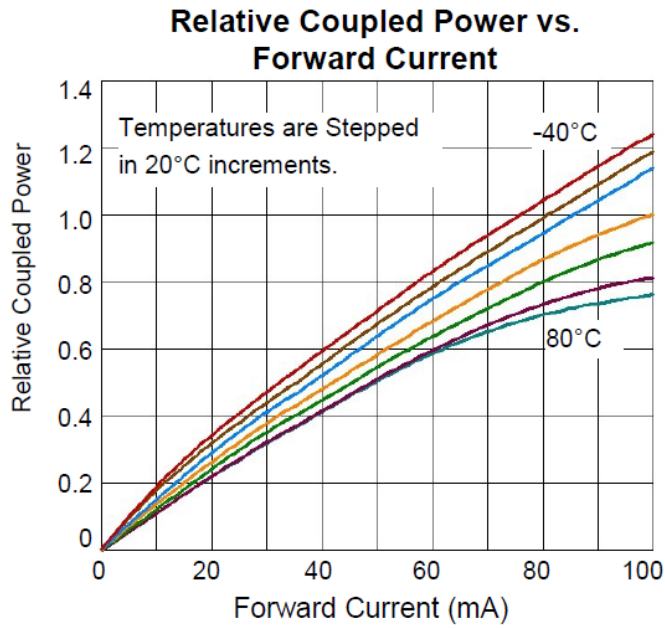

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | OPTEK Technology
www.ttelectronics.com | sensors@ttelectronics.com