

SX-4491

Features:

- 5° sensor with torque and single turn position output
- Ideally suited for demanding electric power steering systems



Electrical

Torque Signal Linearity	±3%
Torque Hysteresis	0.5%
Torque Signal Microgradient	±30% of theoretical slope over 0.4° interval
Torque Signal Sensing Angle	±5°
Position Signal Linearity	±1.5%
Position Signal Microgradient	±30% of theoretical slope over 2° interval
Total Resistance	471 Ω ±30%

Mechanical

Torque Mechanical Travel	±11.4°
Turning Torque (rotor to rotor)	0.03 NM Max.
Turning Torque (position rotor to housing)	0.06 NM Max.
Position Mechanical Travel	Continuous
Weight	grams maximum

Environmental

Operating Temperature Range	-40°C to +85°C
Shock	14 ms half-sine at 300 m/s ²
Vibration	10 to 55 Hz with 1 mm P-P constant displacement, 120 hours each of 3 planes
Torque Rotational Life	1 million cycles
Position Rotational Life	1 million cycles
Storage Temperature Range	-40°C to +105°C




-270

-360



Output Charts

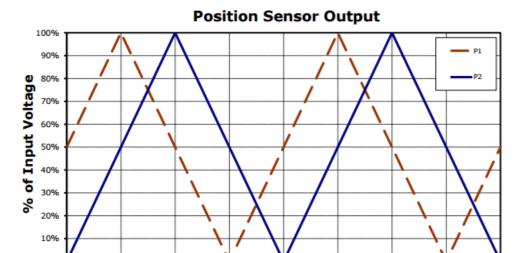

180

Steering Angle (Degrees) CW direction ->

270

360


-90

-180

Typical Torque Outputs 100% 90% 80% 70% 60% Outputs (% of Vt) 50% **T**2 40% 30% 20% 10% CW direction -> -4 -2 6 Relative angle (degrees)




Outline Drawing

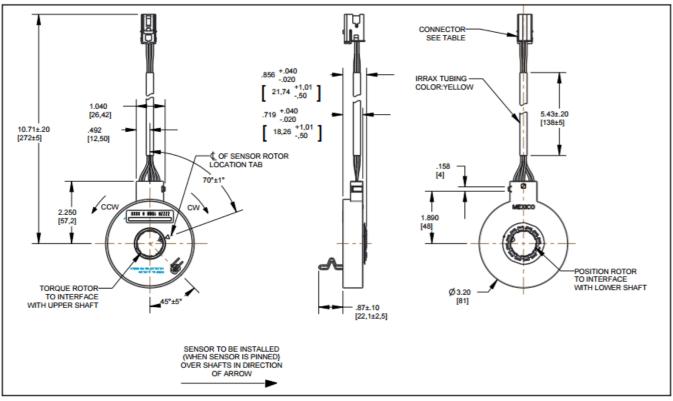

Tolerances ±0.25 mm unless otherwise specified. See drawing # 122-4491-80 for details.

PIN OUTS-8 PIN CONNECTOR DELPHI 15406142 1 2 3 4 5 6 7 8 (PIN No'S ARE INDICATED AS WIRES ENTER CONNECTOR END) PIN No. SIGNAL WIRE COLOR 1 NOT USED --2 PI BROWN 3 Vcc RED 4 T2 PURPLE 5 NOT USED --6 P2 WHITE 7 GND BLACK 8 TI BLUE

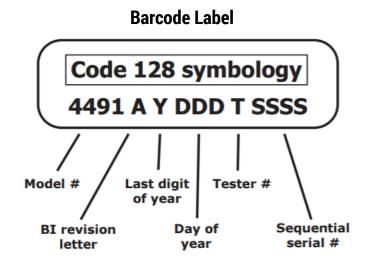

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.



Recommended Interface

