

# AC/DC DESKTOP ADAPTER

12 - 56VDC 150W

TEAMD150



## Features:

- GaN Technology
- Compact Size
- Class I and Class II input versions
- 2xMOPP Insulation
- Short circuit/over-voltage/over-current/over-temperature
- Energy Efficiency Level VI or CoC Tier II, Up to 95%
- No load power consumption ≤0.21W (VI), ≤0.15W (Tier II)



\*Safety approvals may be model dependent. Consult TT Electronics for specifics or for additional safety approvals required.

## Description:

The TEAMD150 series of AC/DC switching power supplies provide 150 watts of continuous power. They are available as Class I or Class II input devices with IEC320 C14, C6, C8, or C18 inlets that mate with interchangeable AC cords for world-wide use. All models meet EN55011, FCC PART 15, EN55032, EN61000, CISPR11 and CISPR32 emissions limits and comply with IEC 60601-1 and IEC 62368-1 standards.

Model	Voltage	Current	Total Power	Load Regulation	Line Regulation	Ripple & Noise (P-P)
TEAMD150-12	12VDC	12.5A	150W	±5%	±1%	300mV
TEAMD150-13	15VDC	10A	150W	±5%	±1%	300mV
TEAMD150-13-2	19VDC	7.89A	150W	±5%	±1%	360mV
TEAMD150-14	24VDC	6.25A	150W	±5%	±1%	360mV
TEAMD150-17	36VDC	4.17A	150W	±5%	±1%	540mV
TEAMD150-18	48VDC	3.12A	150W	±5%	±1%	840mV
TEAMD150-19-1	56VDC	2.68A	150W	±5%	±1%	840mV

## Notes:

1. Output ripple and noise is measured within a limited bandwidth of 20MHz, with a 0.1µF ceramic capacitor and a 47µF electrolytic capacitor in parallel with the device output.
2. Line regulation is defined by changing ±10% of input voltage from nominal line at rated load.
3. Max. Power (W) ≥ Vo x Io
4. C14 input receptacle is standard.  
For C6 input receptacle, add "S" to the end of the model number.  
For C8 input receptacle, add "SF" to the end of the model number.  
For C18 input receptacle, add "F" to the end of the model number.

General Note

All data sheets are subject to change without notice.

# AC/DC DESKTOP ADAPTER

## 12 - 56VDC 150W

### TEAMD150



#### Specifications:

Input	
Input Voltage	90 - 264VAC
Input Frequency	47 - 63Hz
Input Current	≤2.5A
Inrush Current (Typical)	≤120A at 230VAC, cold start
No Load Power Consumption	Meets DOE Level VI requirements
Output	
Total Output Power	See Table
Output Voltage	See Table
Hold Up Time (Typical)	≥10mS at 115VAC, full load
Earth Leakage Current (Class I Models)	≤250µA
Touch Current	≤100µA at 240VAC, 50Hz
Turn on Delay	≤3S
Protection Features	
Over-voltage	Auto-Recovery
Over-current	Auto-Recovery
Over-temperature	Latch-Off
Short Circuit	Auto-Recovery
Environmental	
Operating Temperature	0° - +60°C (See Derating Curve)
Storage Temperature	-20° - +85°C
Operating Humidity	10 - 90% non-condensing
Storage Humidity	5 - 95% non-condensing
Altitude	<5000m operational and storage

#### General Note

All data sheets are subject to change without notice.

# AC/DC DESKTOP ADAPTER

## 12 - 56VDC 150W

### TEAMD150



#### Specifications (continued):

General Specifications	
Dimensions	5.96"(151.3mm)L x 2.98"(75.8mm)W x 1.00"(25.4mm)H
Weight	1.06lb (480g)
MTBF	>100,000 hours per MIL-HDBK-217F at full load and 25°C ambient
AC Input Connector	IEC320: C6, C8, C14, C18
DC Output Connector	Kycon KPP-4P or equivalent Other connectors available upon request
Safety	
Approvals	IEC 60601-1 UL/cUL 60601-1 EN 60601-1 IEC 62368-1
*Safety approvals may be model dependent. Consult TT Electronics for specifics or for additional safety approvals required.	
EMC	
Conducted Emission	EN55011, EN55032, FCC PART 15
Radiated Emission	EN55011, EN55032, FCC PART 15
Harmonic Currents	EN61000-3-2, Class A
Voltage Flicker	EN61000-3-3:2013
Electrostatic Discharge	IEC61000-4-2: ( $\pm 15\text{kV}$ air, $\pm 8\text{kV}$ contact)
Radiated Immunity	IEC61000-4-3: (10V/m)
EFT/Burst	IEC61000-4-4: ( $\pm 2\text{kV}$ )
Surge Immunity	IEC61000-4-5: (1kV diff, 2kV common)
Conducted Immunity	IEC61000-4-6: (10Vrms)
Power Frequency Magnetic Field Immunity	IEC61000-4-8: (30A/m)
Dips/Interruptions	IEC61000-4-11: (<5% dip 0.5 periods, 70% dip 25 periods, <5% interruptions 250 periods)


# AC/DC DESKTOP ADAPTER

## 12 - 56VDC 150W


### TEAMD150



## **Mechanical Outline:**

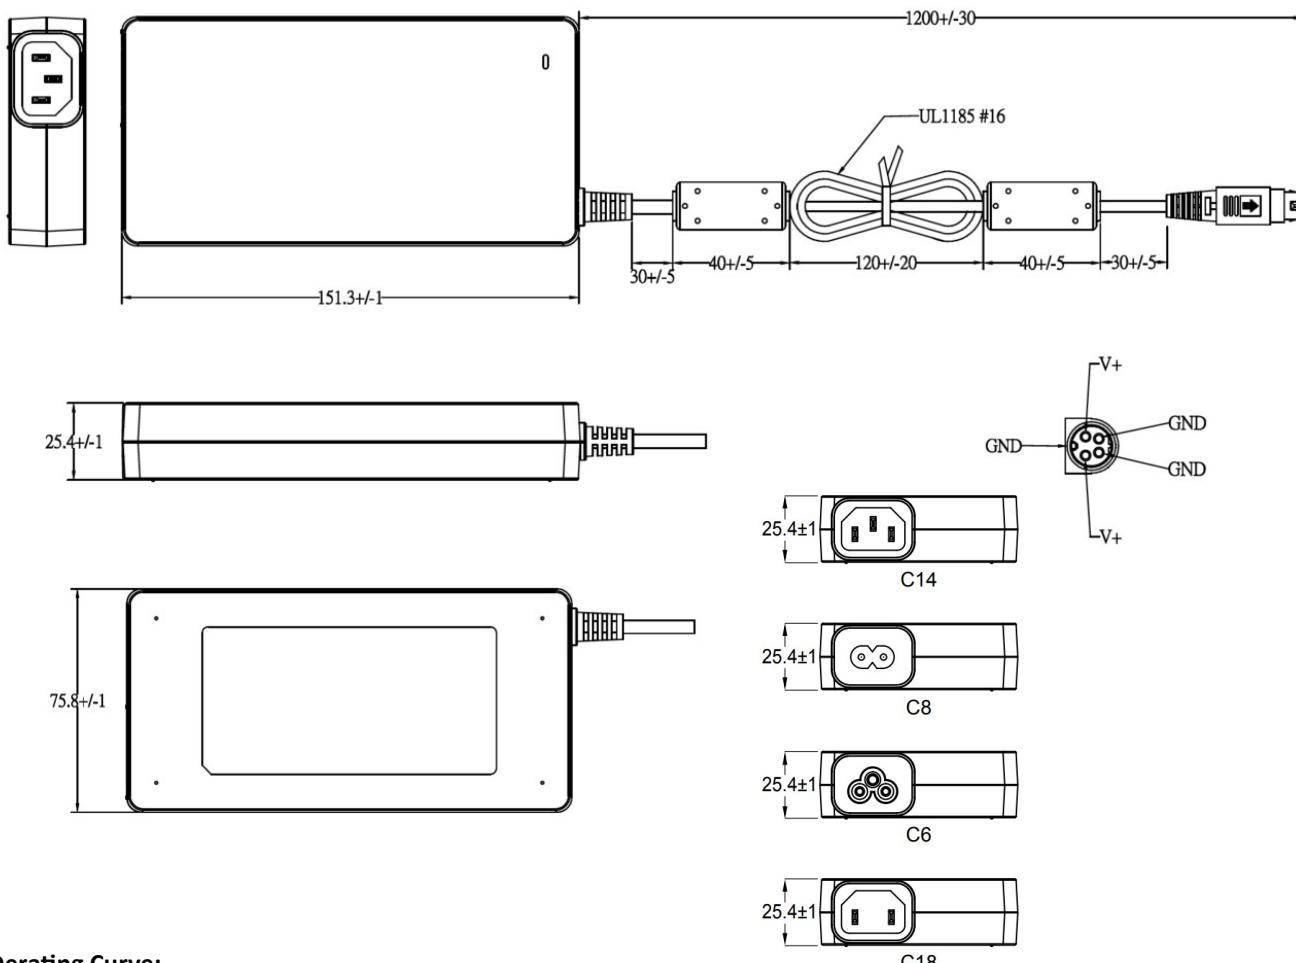

## Derating Curve:

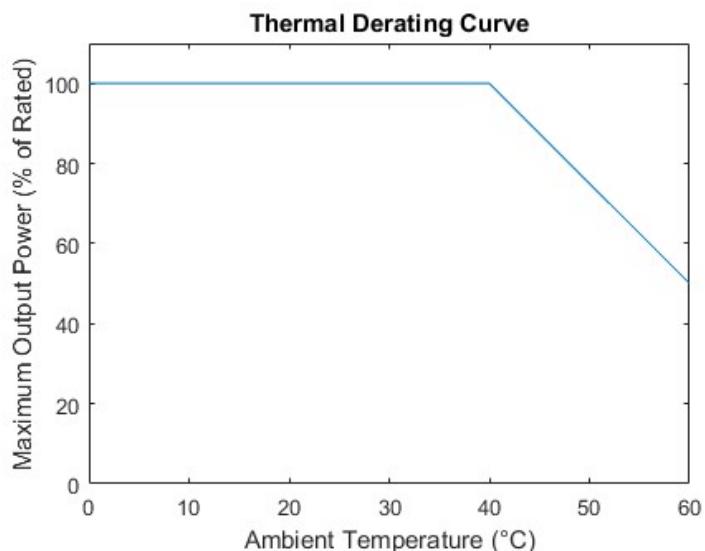

### General Note

All data sheets are subject to change without notice.

TT Electronics

<http://www.ttelectronics.com/power-supplies>