

# Platon NS Series Pelton Wheel Flowmeter



## DS1010

### Features:

- Measuring Range: 8 to 1
- Accuracy:  $\pm 1.0\%$
- Repeatability  $\pm 0.25\%$
- Operating Temperature: 150°C max
- Operating Pressure: limited only by coupling design
- Transmission length: Up to 300 meters
- Overall length: Flanged 114mm Screwed 95mm



### Description:

A turbine flowmeter operating on the Pelton wheel principle for low flowrate applications on low viscosity fluids.

Conventional axial flow turbine meters become increasingly difficult to manufacture in very small sizes and bearing drag becomes more significant. The Pelton wheel on the other hand still retains a manageable diameter allowing close machining tolerances whilst being capable of handling very low flow rates with reasonable accuracy.

The units may be used for additive flows, fuel consumption metering, perfumes, colourings etc. With this design a range of interchangeable metering plugs may be provided within one body size, such that flow ranges may be changed very simply.

Construction is in stainless steel as standard but other materials may be used to suit the corrosive properties of the metered fluid. Flanges to ANSI, EN1092-1 or BS10 may be fitted and a design is also available with Ermeto or BSP couplings for high pressure hydraulic work.

### Operating Principle:

In operation a star shaped paddle wheel is housed within a metering plug containing a small jet hole such that a high velocity jet is imparted tangentially on the rotor. Rotational speed and hence frequency are directly proportional to flowrate. The sharp edges of the rotor are detected by a reluctance pick off coil and an alternating voltage is thus generated.



#### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Roxspur Measurement & Control Ltd  
2 Downgate Drive, Sheffield, S4 8BT, England | Ph: +44(0)114 244 2521  
www.roxspur.com | sales@roxspur.com

# Platon NS Series Pelton Wheel Flowmeter




DS1010

## SIZING TABLE

Type No.	Flow Range L/min	K Factor Pulse/L	Pressure Drop (bar)
NS500/063	0.18-1.8	20700	0.5
NS500/093	0.45-3.2	14500	0.4
NS500/110	1.1-5.4	12500	0.4
NS500/125	1.3-6.5	10500	0.4

## PARTS & MATERIALS

1. Connector	Die-cast Aluminum
2. Pick-Off Coil	316 Stainless Steel Body
3. Flowmeter Housing	316 Stainless Steel
4. 'O'-Ring	Butyl Rubber or PTFE
5. Rotor	431 Stainless Teel or Ferralium, Tungsten Carbide Bush
6. Metering Plug	316 Stainless Steel
7. Retaining Screw	316 Stainless Steel
8. Spindle	Tungsten Carbide

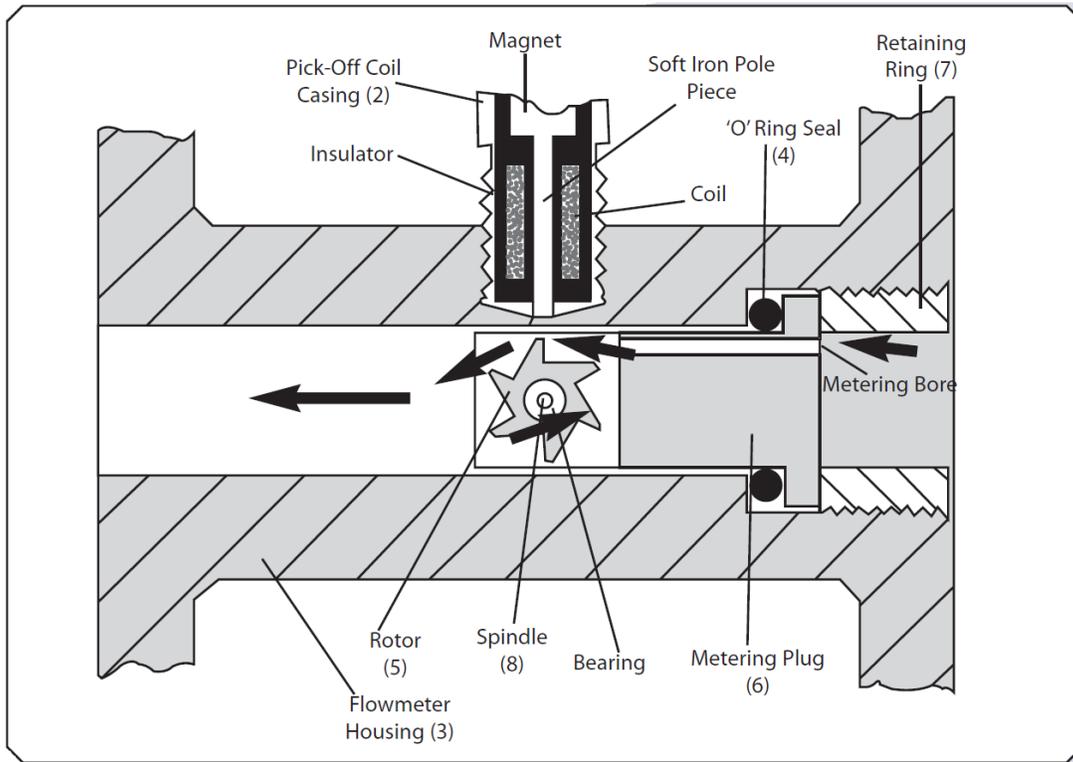

Every effort has been made during the preparation of this document to ensure the accuracy of statements and specifications. However, we do not accept liability for damage, injury, loss or expense caused by errors or omissions made. We reserve the right to withdraw or amend products or documentation without notice.

Head Office: 2 Downgate Drive, Sheffield, S4 8BT, England  
Tel: +44(0)114 244 2521 Fax: +44(0)114 243 4838



03HWAR0410

CERTIFICATE No. FM22358

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Roxspur Measurement & Control Ltd  
2 Downgate Drive, Sheffield, S4 8BT, England | Ph: +44(0)114 244 2521  
www.roxspur.com | sales@roxspur.com