


AS056 – Hall Effect 600A Current Sensor

Application Note

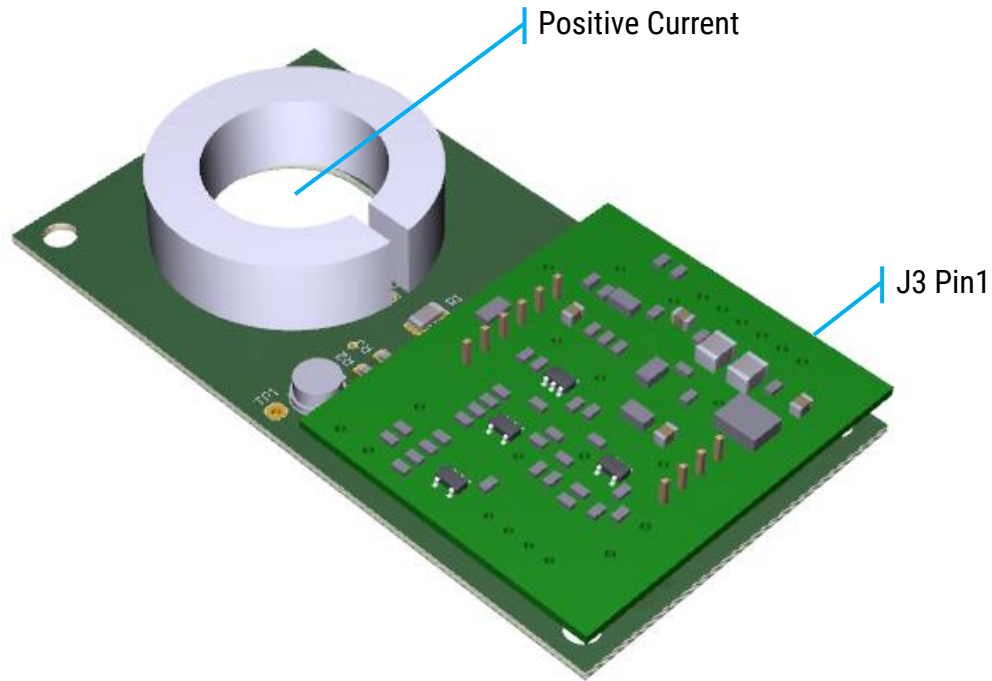

The 600A Hall Effect Current Sensor is made from 2 parts, a HEC005 Sensor PCB and a HEC001 Amplifier PCB.

Module Configuration	HEC005 Sensor and HEC001 Amplifier
Power Supply	J3 Pin1 0V, Pin2 Vcc. Vcc 6V to 18V, current limit 12mA. Note 2.
Differential Output	J3 Pin5 Vout-, Pin6 Vout+. Range $\pm 2.0V$. Voltage on pin 5 is 2.50V with respect to 0V
Bandwidth	DC to 34kHz. Limited by the analogue filter
Output Scaling	Set to $\pm 600A$ fullscale $\pm 2.0V$.
Dimensions	Nominal 82mm, 44mm, 30mm, aperture 17mm. Protective coating may change these dimensions.
Operating Temperature	Designed for Ambient -55 to $+125^{\circ}C$. Performance tested -30 to $110^{\circ}C$.
Average error over measurement range and temperature range	Average error 7.0A Standard Deviation 5.5 Note 1.
Linearity error over measurement range and temperature range	Linearity error 0.1A Standard Deviation 0.68. Note 1.

Note 1: measured during Design Assurance Test

Note 2: The connector J3 is 0.1inch pitch and 6 pins.

AS056 – Hall Effect 600A Current Sensor



Application Note

Calibration

Sensors are calibrated to remove DC offset and set the scaling at room ambient temperature 20° to 30°C. As part of the Design Assurance Test the sensors were characterised at various temperatures and linear equations fitted to the results. The Linearity error was measured but this also indicates that the sensor can be used with better accuracy if the system can use the linear equations by measuring the operating temperature as well as the sensor output. A typical set of equations might be:

Temperature	Calibration equation
-20°C	$y = 296.99x + 0.7083$
20°C	$y = 299.43x + 0.695$
60°C	$y = 299.47x + 0.6925$
100°C	$y = 298.07x + 0.735$
110°C	$y = 298.74x + 0.8454$

Current is y Amps, measured voltage is x Volts.

Summary of performance measured during Design Assurance DC Test:

Temperature	Using nominal calibration 300A/V: Average Error and Standard Deviation over full operating range. Amps	Using the linear equations: Average Error and Standard Deviation over full operating range. Amps
-20°C	13.37 SD 6.48	-0.14 SD 0.79
0°C	11.05 SD 6.21	-0.13 SD 0.80
20°C	6.94 SD 3.28	-0.13 SD 0.76
40°C	4.50 SD 2.04	-0.13 SD 0.75
60°C	4.32 SD 2.83	-0.09 SD 0.66
80°C	4.57 SD 3.82	-0.08 SD 0.63
100°C	5.52 SD 5.06	-0.08 SD 0.58
120°C	5.99 SD 5.33	-0.06 SD 0.58

Summary of performance measured during Design Assurance AC Test (test rig blocks DC offset):

Temperature	Using nominal calibration 300A/V: Average Error and Standard Deviation over full operating range. Aac	Using the linear equations: Average Error and Standard Deviation over full operating range. Aac
-20°C	0.86 SD 1.33	0.002 SD 0.39
0°C	0.04 SD 0.78	0.001 SD 0.35
20°C	0.61 SD 0.51	0.001 SD 0.36
40°C	0.61 SD 0.53	0.002 SD 0.33
60°C	0.61 SD 0.56	0.001 SD 0.31
80°C	0.28 SD 0.65	0.001 SD 0.29
100°C	0.22 SD 0.90	0.001 SD 0.26
120°C	0.42 SD 0.79	0.001 SD 0.25

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

TT Electronics | Aero Stanrew Limited
Gratton Way, Roundswell Business Park, Barnstaple, EX31 3AR, UK | Ph: +44 (0) 1271 341300
www.ttelectronics.com | barnstaplequotes@ttelectronics.com

AS056 – Hall Effect 600A Current Sensor



Application Note

Current Sensor Modules

TT Electronics have developed a modular approach to the manufacture of current sensors for use with electrical systems in harsh environments. The modular design allows a customer to select key sensor parameters so that TT can build a product to meet the customer's requirements. The devices feature a range of Hall and Rogowski sensors, amplifiers and digital converters, and together these modules enable economical solutions that are high in quality and performance.

Circuit boards have been developed to TRL5 standard ready for use in relevant harsh environments, especially aerospace applications such as electrical systems, generators and motor drives.

List of Modules:

Part Type	Description
HEC005	Hall sensor, range 400A to 1200A
HEC006	Buffered Hall sensor, range 30A to 1200A
HEC001	Hall sensor amplifier
LCR011	Rogowski coil sensor 400Aac to 2000Aac
LCR012	Rogowski amplifier (di/dt)
LCR013	Rogowski integrator and amplifier
LCR014	Rogowski integrator and dual amplifier (e.g. 400Aac, 2000A transient)
DOS001	12bit ADC, one or two channel, SPI interface

Issue	Date	Change
RevA	28/02/2019	First Draft
RevB	04/03/2019	AC test results added

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

TT Electronics | Aero Stanrew Limited
Gratton Way, Roundswell Business Park, Barnstaple, EX31 3AR, UK | Ph: +44 (0) 1271 341300
www.ttelectronics.com | barnstaplequotes@ttelectronics.com