

# INDUSTRIAL AC/DC MODULAR CONFIGURABLE POWER SUPPLY 1200W

## Vox Power: NEVO+1200S

### Features:

- Up to 1200 Watts of output power
- Primary side remote on/off function
- Standby power  $\leq 3$  Watts
- 6" x 6" x 1.61" footprint
- Low noise fan option
- UL60950 2nd edition approved
- Industry leading power density (21W/in<sup>3</sup>)
- Lightest modular design - only 1.2kg - 1000Watts/kg
- Efficiency up to 89%
- Remote current / voltage programming
- Accurate current sharing
- Parallel and series connection of modules
- 2 x 5V 1A bias supply
- Field configurable
- RoHS compliant
- 2 Year warranty



### Description:

The NEVO+1200S configurable power supply is the smallest in its class, delivering up to 1200W from a 6" x 6" x 1.61" package weighing only 1.2kg when fully configured and is the ultimate power solution for demanding industrial applications where size, weight, low standby power and primary side inhibit are vital factors. Each configured unit consists of an input module with up to eight output modules, where any combination of outputs can be fitted to create a power solution with up to sixteen isolated outputs.

Standard features include intelligent fan control, wide output voltage adjust capability and primary side shutdown with standby power consumption of less than 3 Watts. A low noise fan option with virtually silent operation is also available, which allows you to use this innovative power supply in even the quietest of environments. The series carries full IEC/UL60950 safety approvals, complies with EN61000 Immunity, EN55022-B EMC Standards and features market leading specifications and design in application support.

INPUT ELECTRICAL					
Parameter	Details	Min	Typ	Max	Units
AC input voltage	Nominal range is 100V to 240V	85		264	Vrms
AC input frequency	Contact factory for 400Hz operation.	47	50/60	63	Hz
DC input voltage	Standard	120		370	Vdc
Power rating	See graphs for de-rating			1200	Watts
Input current	1200 Watts output at 120Vrms input		12		Amps
Inrush current	265Vrms (cold start)			40	Amps
Fusing	5x20 Fast acting			12.5	Amps
Input current limit			14		Amps
Efficiency	See graphs		86	89	%
Idle power	All outputs fitted and enabled		46		Watts
Idle power	All outputs fitted and disabled		32		Watts
Standby power	Latched off state, 120Vrms		2.5		Watts
Power factor			0.99	0.99	
Holdup	1200Watts output at 120Vrms input	17	20	21	mS
UVLO	Turn on only	78		84	Vrms
Over temperature	Internally monitored. Latching	115		125	°C
Reliability	40°C 80% load			2	FPMH

# INDUSTRIAL AC/DC MODULAR CONFIGURABLE POWER SUPPLY 1200W

## Vox Power: NEVO+1200S

INPUT ELECTRICAL						
Parameter	Details	Min	Typ	Max	Units	
Signals	Output Bias voltage	Two isolated Bias Outputs available	4.8	5	5.2	V
	Output Bias current	Hiccup type current limit	0		1	A
	Power good voltage	PNP open collector with internal 10k pull down resistor	8	10	15	V
	Power good current		0		20	mA
	Inhibit voltage		2		15	V
	Inhibit current	10k ohm input impedance	0.2		1.5	mA
	Global inhibit voltage		3		15	V
	Global inhibit current	5k ohm input impedance	0.6		3	mA
	AC_OK voltage	High output	4.7		5.2	V
		Low output	0		0.1	V
	AC_OK current		-10		10	mA
	AC_OK warning	See user manual for exceptions	5			mS
	NP Primary Bias voltage	Medically Isolated	4.8	5	5.2	V
	NP Primary Bias current	Hiccup type current limit			0.5	A
	NP Primary Remote On/Off	Negative Edge Triggered, Refer to User Manual		5		V

INSTALLATION			
Parameter	Details	Parameter	Details
Equipment class	I	Flammability rating	94V-2
Installation category	II	IP rating	IP10
Pollution degree	2	ROHS Compliance	2011/65/EC
Material group	IIIb		indoor use only

RELIABILITY				
Component	Details	Min	Max	Units
Fan	Mag Lev Std (2 Fans per unit)		3.8	FPMH
Input	Excluding FAN		2	FPMH
Output	See individual output datasheets		1	FPMH
Warranty			2	Years

SAFETY				
Parameter	Details	Min	Max	Units
Isolation Voltage	Input to output (2 x MOPP)		4000	Vac
	Input to chassis (1 x MOPP)		1500	Vac
	Output to chassis		250	Vdc
	Output to output		250	Vdc
Isolation Clearance	Primary to secondary (reinforced)	7		mm
	Primary to chassis (basic)	2.5		mm
Isolation Creepage	Primary to secondary (reinforced)	12		mm
	Primary to chassis (basic)	4		mm
Leakage Current	Medical: 265Vac, 63Hz, 25°C		1500	uA

# INDUSTRIAL AC/DC MODULAR CONFIGURABLE POWER SUPPLY 1200W

## Vox Power: NEVO+1200S

MECHANICAL	
Parameter	Details
Size	154.5mm x 152.4mm x 41.0 ± 1.0mm
Weight	720 gram + 60 gram per output module
Mounting	Bottom (see diagram for details)

ENVIRONMENTAL					
	Parameter	Details	Min	Max	Units
Storage	Temperature		-40	+85	°C
	Humidity	Relative, non-condensing	5	95	%
	Altitude		-200	5000	m
	Air pressure		54	106	kPa
Operation	Temperature	Full power	-20	50	°C
		De-rate input and outputs at 2.5%/°C	50	70	°C
	Humidity	Relative, non-condensing	5	95	%
	Altitude		-200	3000	m
	Air pressure		78	106	kPa
	Noise level	Unit at idle		42	dBA
	Measured 1m from fan intake	Unit at full power, 25°C		61	dBA
	Shock	3000 bumps at 10G (16ms) half sine wave			
	Vibration	1.5G 10 to 200Hz sine wave, 20G for 15min in 3 axes random vibration			

EMC			
	Parameter	Standard	Level
Emissions	Radiated electric field	EN55011, EN55022, FCC	A (See Note)
	Conducted emissions	EN55011, EN55022, FCC	B
	Harmonic distortion	EN61000-3-2	Compliant
	Flicker & fluctuation	EN61000-3-3	Compliant
Immunity	Electrostatic discharge	EN61000-4-2 (15kV air, 8kV contact)	4
	Radiated RFI	EN61000-4-3 (10V/m)	3
	Fast transient burst	EN61000-4-4 (4kV)	4
	Input line surges	EN61000-4-5 (1kV L-N, 2kV L-E)	3
	Conducted RFI	EN61000-4-6 (10V)	4
	Power freq. magnetic field	EN61000-4-8 (10A/m)	3
	Voltage dips	EN61000-4-11 (EN55024)	Compliant






Note: To meet Class B radiated emissions the end user should add ferrites to I/P and O/P cables. Consult Vox Power for details.

AGENCY APPROVALS		
Standard	Details	File
UL60950-1	UL60950-1 2nd edition, December 19, 2011	UL: E316486
IEC/EN60950-1	IEC 606950-1:2005 (2nd Edition); AM1:2009	
CSA-C22.2 No. 60950-1A-07	2nd Edition	
CE MARK	LVD 2014/35/EU	
UL60950-1		

CB certificate and report available on request

# INDUSTRIAL AC/DC MODULAR CONFIGURABLE POWER SUPPLY 1200W

Vox Power: NEVO+1200S

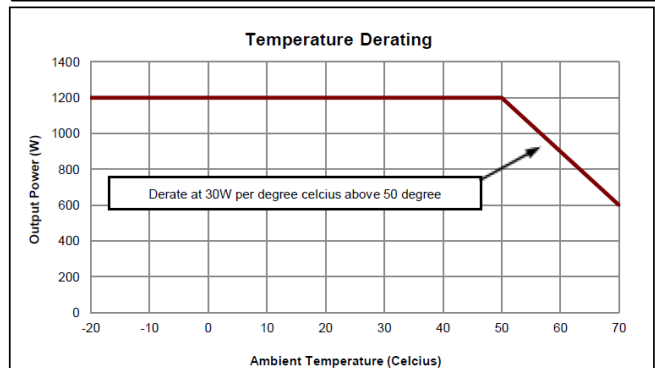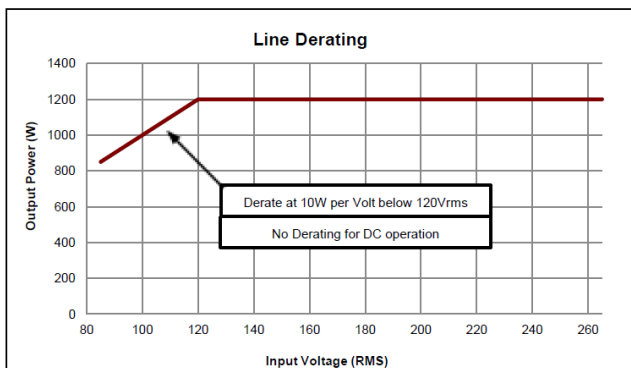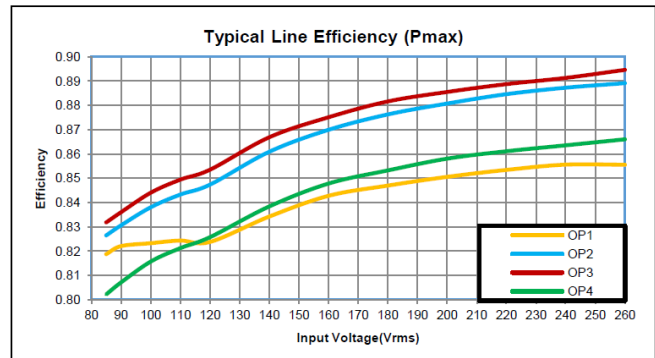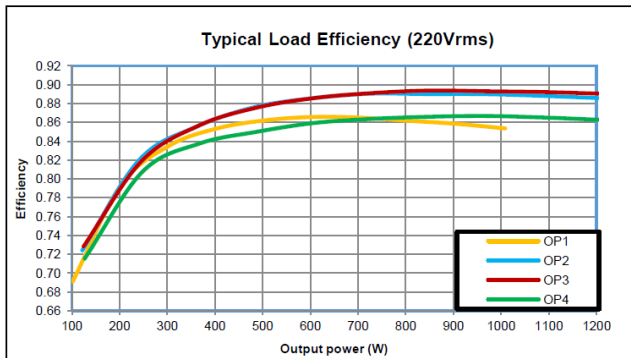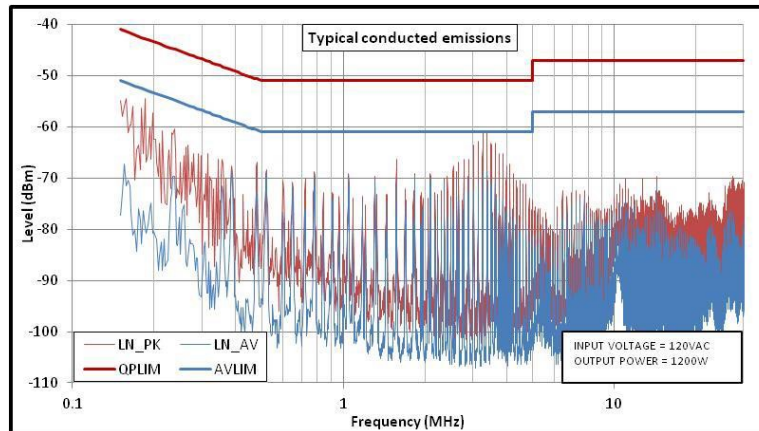


# INDUSTRIAL AC/DC MODULAR CONFIGURABLE POWER SUPPLY 1200W

Vox Power: NEVO+1200S

## Mechanical Dimensions and Mounting Screws

SCREWS			
LOCATION	DETAILS	PENETRATION	TIGHTENING
MOUNTING	M4 x 4	4mm max, including chassis	0.55 NM <sup>(1)</sup>
OUTPUT MODULES	M3 x 5, Countersink Posi, 16 Places	Defined by screw	0.50 NM <sup>(1)</sup>
CHASSIS LID AND FRACTURE	M3 x 5, Countersink Posi, 11 Places	Defined by screw	0.50 NM <sup>(1)</sup>

1. Torque settings are for general reference only. The torque settings shown in the datasheet are the insert manufacturers recommended values.

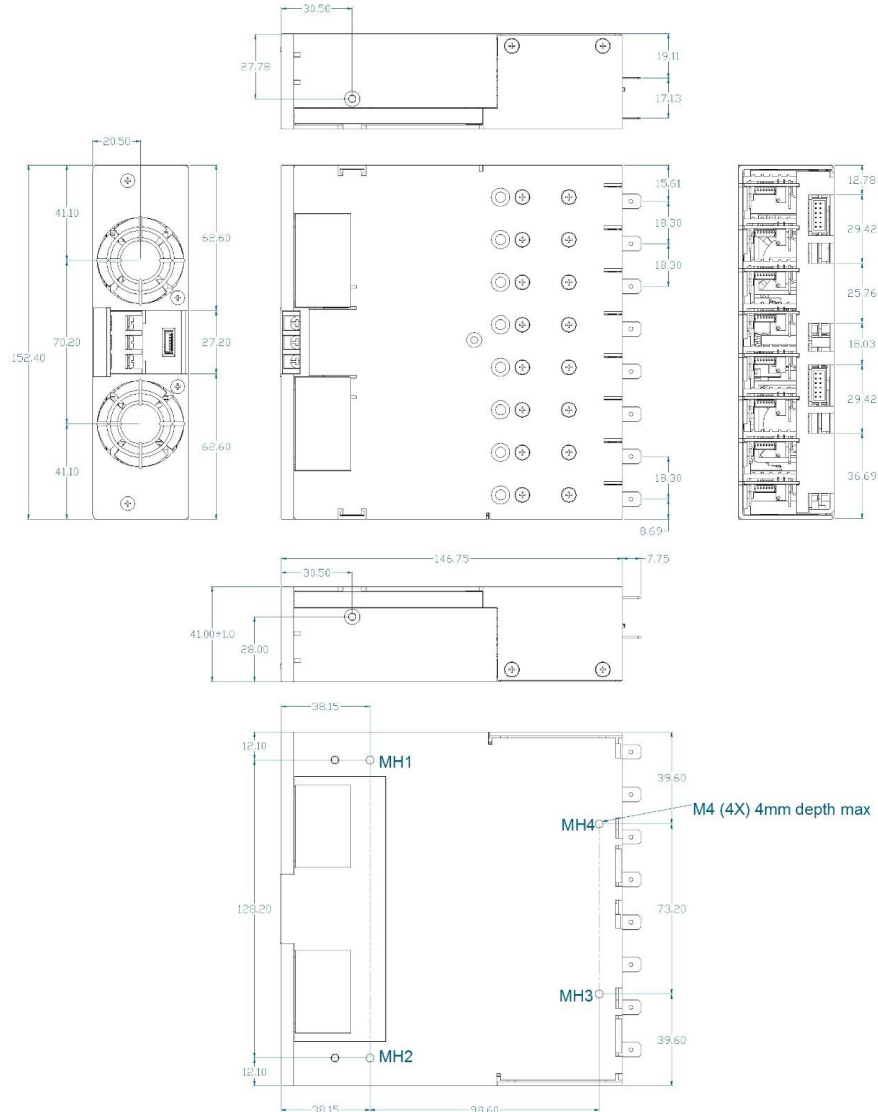


TOLERANCES unless otherwise stated - All dimensions in mm and according to DIN 2768-1/-2 CLASS C

# INDUSTRIAL AC/DC MODULAR CONFIGURABLE POWER SUPPLY 1200W

Vox Power: NEVO+1200S

## Connectors

PINOUTS		
J1		
Circuit	Details	
1	Live	
2	Earth	
3	Neutral	
J2a/b		
Circuit	Details	
1	Power good	Slot A and E
2	Inhibit	
3	Power good	Slot B and F
4	Inhibit	
5	Power good	Slot C and G
6	Inhibit	
7	Power good	Slot D and H
8	Inhibit	
9	Global inhibit	
10	AC OK	
11	+5V 1A Bias Supply	
12	COM	
J6		
Circuit	Details	
1	Common	
2	+5V 500mA Bias	
3	Shut down	
4	Reserved	
5	Reserved	
6	Reserved	

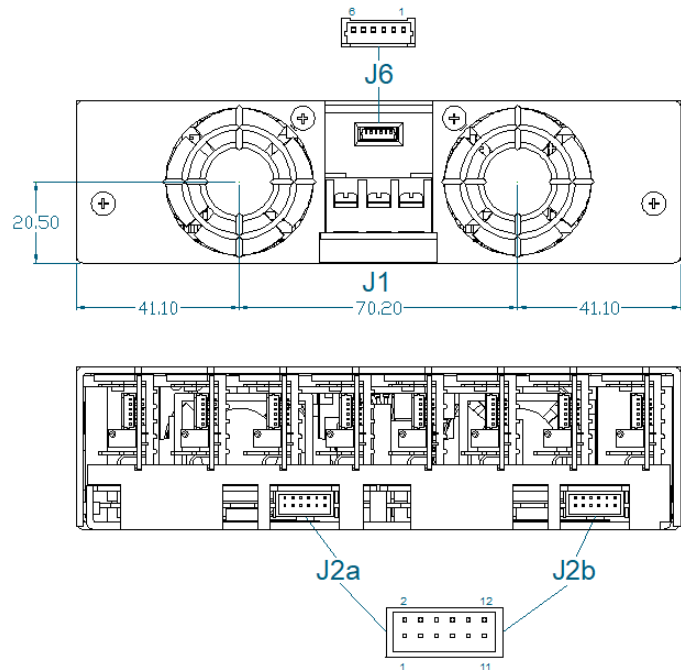

REF.	DETAILS	MANUFACTURER	HOUSING	TERMINAL
J1	MAINS INPUT: 3 Pin, barrier, 6-32 Steel Screws, 0.8 NM or 7IN LB Torque Cable 14-18AWG, 300V, 16A, 105°C, use appropriately rated fork or ring terminal.	MOLEX		
J2a/b	GLOBAL SIGNALS: 12 Pin, 2mm, without Friction Lock, 24-30 AWG	MOLEX	511101251	503948051
J6	INPUT BIAS: OUTPUT SIGNALS: 6 Pin, 1.25mm, with Friction lock, 28-32 AWG	MOLEX	510210600	500588000

### Notes



1. Direct equivalents may be used for any connector parts
2. All cables must be rated 105°C min, equivalent to UL1015

# INDUSTRIAL AC/DC MODULAR CONFIGURABLE POWER SUPPLY 1200W

Vox Power: NEVO+1200S

## SINGLE OUTPUT MODULE CONNECTORS

PINOUPS	
<b>J3</b>	
Circuit	Details
1	Positive output
<b>J4</b>	
Circuit	Details
1	Negative output
<b>J6</b>	
Circuit	Details
1	-Sense
2	+Sense
3	Voltage control
4	Current control / share / out
5	COM
6	+5V local bias supply

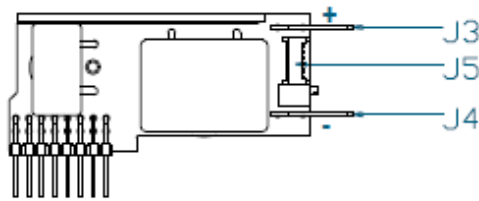

REF.	DETAILS	MANUFACTURER	HOUSING	TERMINAL
J1	MAINS INPUT: 3 Pin, 5.08mm, with Friction Lock, 18-24 AWG	MOLEX	10013036	0008701031
J2	GLOBAL SIGNALS: 12 Pin, 2mm, without Friction Lock, 24-30 AWG	MOLEX	511101251	0503948051
J3/4(1)	OUTPUT POWER TERMINAL: TAB SIZE 6.35mmx0.8mm	VARIOUS		VARIOUS
J5	OUTPUT SIGNALS: 6 Pin, 1.25mm, with Friction lock, 28-32 AWG	MOLEX	0510210600	0500588000

**Notes**

1. Terminal and wire current rating must exceed maximum short circuit output current. Eg. Output 1 = 25A\*1.25 = 31.25Amps
2. Direct equivalents may be used for any connector parts
3. All cables must be rated 105°C min, equivalent to UL1015