

# Slide Potentiometer

PSL2



**OBSOLETE**

## Features:

- Operation life 300,000 minimum
- Resistance range 1 kΩ - 1 MΩ
- Smooth feel with dual rail internal system
- Dual track options available
- Range of taper resistance options




## Description:

PS2 family of linear non-motorized potentiometers. This potentiometer is perfect for mixing boards and other audio visual equipment.

## Applications:

- Audio mixers
- Video mixers
- Light boards
- Keyboards
- Musical instruments
- Stage equipment

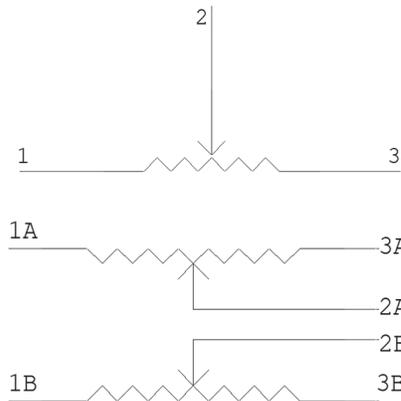

## 3D Model

To view 3D model:  
1) Enable 3D content  
2) Click and drag below



If unable to view 3D content, download and save this PDF to your computer and open it in Adobe Acrobat Reader.

## Electrical Characteristics

$T_A = 25^\circ\text{C}$  unless otherwise noted

Resistance Range	1 kΩ—1 MΩ
Standard Resistance Tolerance	1 kΩ- 1 MΩ $\pm 20\%$ R < 1 kΩ or R > 1 MΩ $\pm 30\%$
Resistance Taper	A,B,C
Maximum Operating Voltage	200 Vac / 10 Vdc
Rated Power	0.5 Watt
Dielectric Strength	1 minute at 300 Vac
Slider Noise	$\leq 47$ mV
Insulation Resistance	$\geq 100$ MΩ at 250 Vdc
Residual Resistance	R1,2— $\leq 5$ Ω R2,3 — $\leq 5$ Ω
Element Count	Single/Dual
Tracking Error	-40 dB—0 dB $\leq \pm 3$ dB

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies  
Circulo de la Amistad #102 PIMSA IV Mexicali B.C. Mexico C.P 21210  
Ph: + 1 (714) 447-2345  
www.ttelectronics.com/bi-technologies

Rev - 06/2019 Page 1

Document #: \_\_\_\_\_

### Fader Characteristics

T<sub>A</sub> = 25°C unless otherwise noted

Slide Travel	45mm, 60mm, 100mm
Operating Force	5—120 gf.cm
Stopper Strength	5 Kgf.cm for 5 seconds
Lever Wobble	1.6mm p-p maximum
Operational Life	300,000 cycles minimum
Total Resistance Shift	±15%
Touch Sense Track	NO
Lever Deviation	0.5mm max (one side)

### Environmental Characteristics

T<sub>A</sub> = 25°C unless otherwise noted

Operating Temperature Range	-10°C -70°C
IP Rating	N/A
Soldering Condition	260°C for 3 seconds
RoHS	Please refer to TT Electronics website
REACH	Please refer to TT Electronics website

### Ordering Info

PSL2	100	N	2	T	02	05B	103
------	-----	---	---	---	----	-----	-----

**Part Family**

**Travel (mm)**

045/060/100

**Motor Option**

N - N/A

**Track Count**

1 - Single Track

2 - Dual Track

**Terminal Type**

T - PC Pins

**Lever Height**

See Lever Table

**Resistance Taper**

See Resistance Taper Table

**Resistance Code**

See Resistance Chart

Lever Table		
Order Code	L(F)(H) (mm)	Lever Style
01	20(10)	A
02 03	15(10)(3.8) 21(9)(3.8)	B
04 05 06	8 11.5 14	C
07 08 09	10 15 20	D

Resistance Taper Table (Code)		
Taper "A"	Taper "B"	Taper "C"
05A	00B	05C
10A	01B	10C
15A	02B	15C
20A	03B	20C
25A	04B	25C
30A	05B	30C

Code	Resistance
102	1K
202	2K
502	5K
103	10K
203	20K
503	50K
104	100K
204	200K
504	500K

**General Note**


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

### Outline Drawings


Lever Table				
Lever Style				
Order Code -L(F)(H) Units: mm	01 - 20(10)	02 - 15(10)(3.8) 03 - 20(10)(3.8)	04 - 8 05 - 11.5 06 - 14	07 - 10 08 - 15 09 - 20

### PSL2 Series Circuit Diagram

#### 1 Track

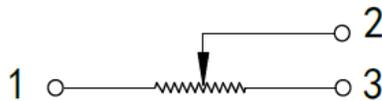

#### 2 Track

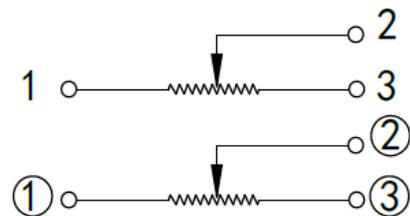




# Slide Potentiometer

PSL2




**OBSOLETE**



## 45mm Travel—Single Track

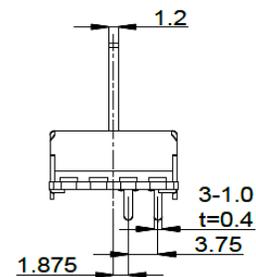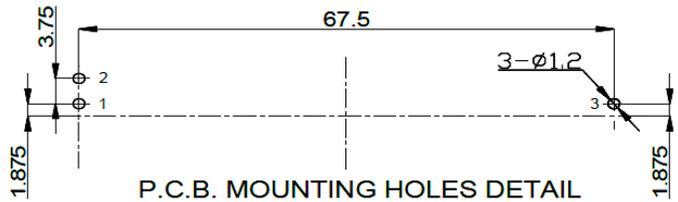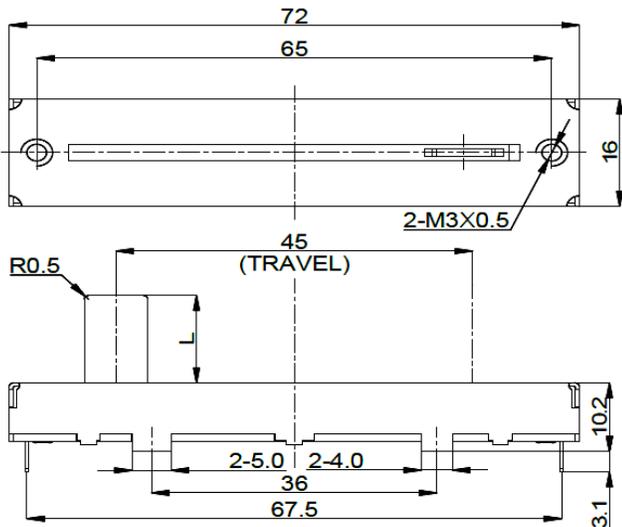

## 45mm Travel—Dual Track

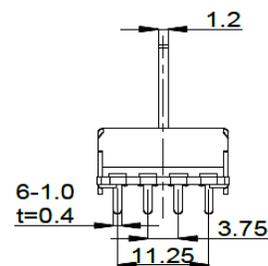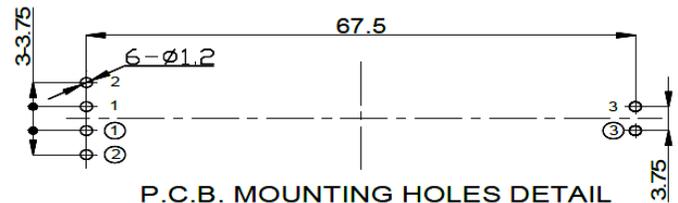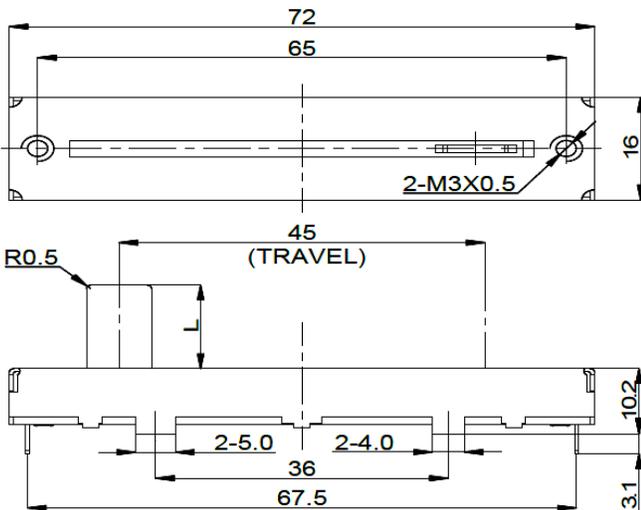

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies  
Circulo de la Amistad #102 PIMSA IV Mexicali B.C. Mexico C.P 21210  
Ph: + 1 (714) 447-2345  
www.ttelectronics.com/bi-technologies

Rev - 06/2019 Page 5

Document #: \_\_\_\_\_





# Slide Potentiometer

PSL2





**OBSOLETE**



## 60mm Travel—Single Track

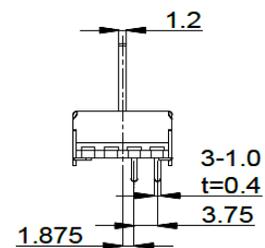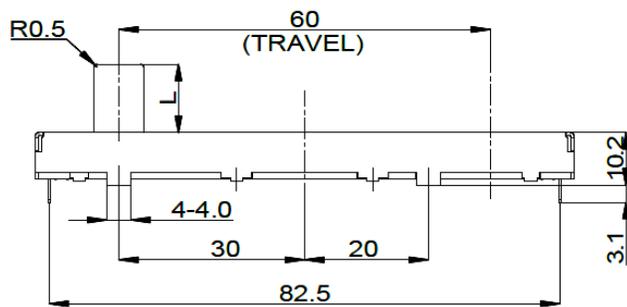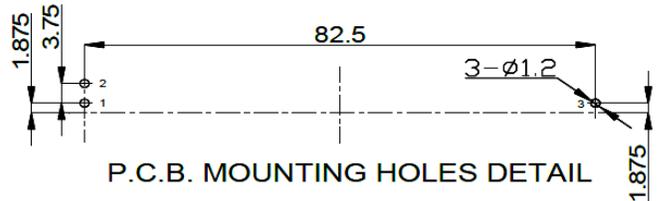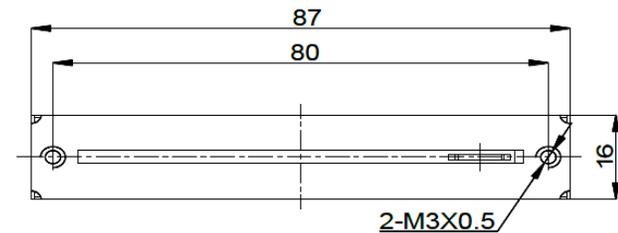

## 60mm Travel—Dual Track

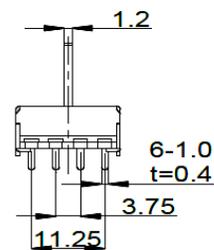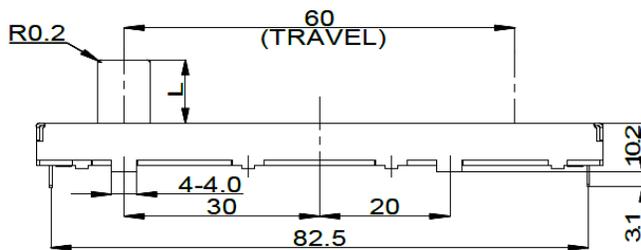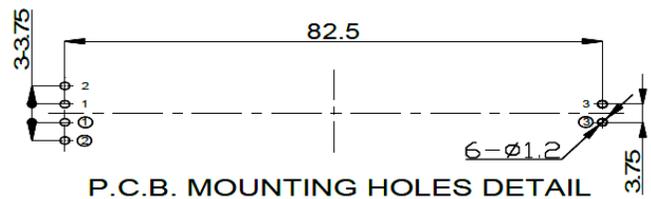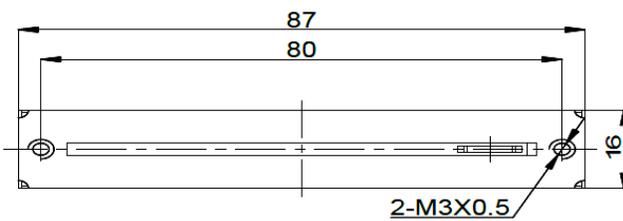

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies  
 Circulo de la Amistad #102 PIMSA IV Mexicali B.C. Mexico C.P 21210  
 Ph: + 1 (714) 447-2345  
[www.ttelectronics.com/bi-technologies](http://www.ttelectronics.com/bi-technologies)

Rev - 06/2019 Page 6

Document #: \_\_\_\_\_


# Slide Potentiometer

PSL2


**OBSOLETE**



## 100mm Travel—Single Track

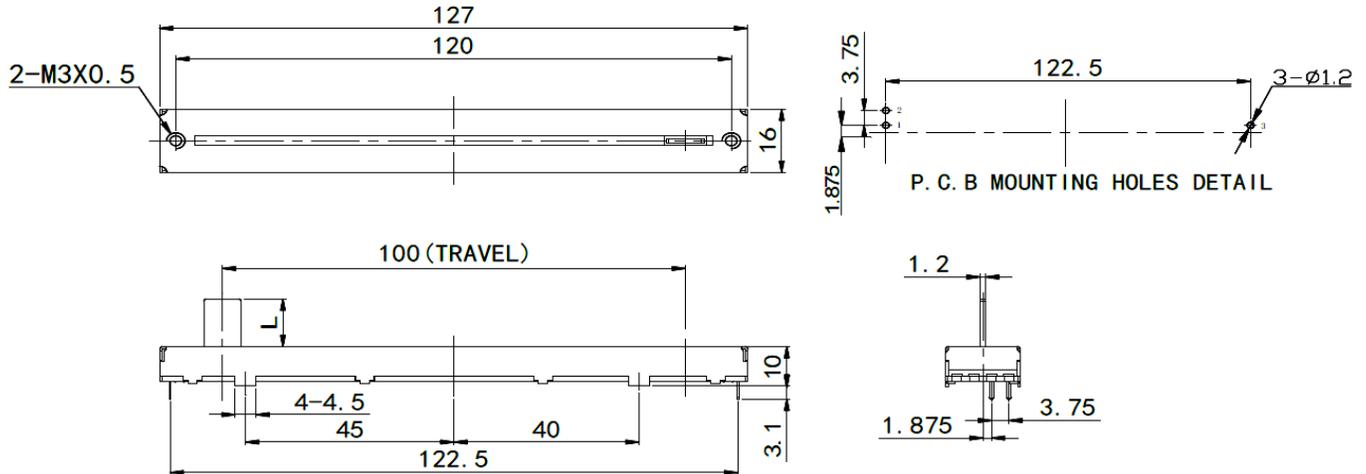

## 100mm Travel—Dual Track

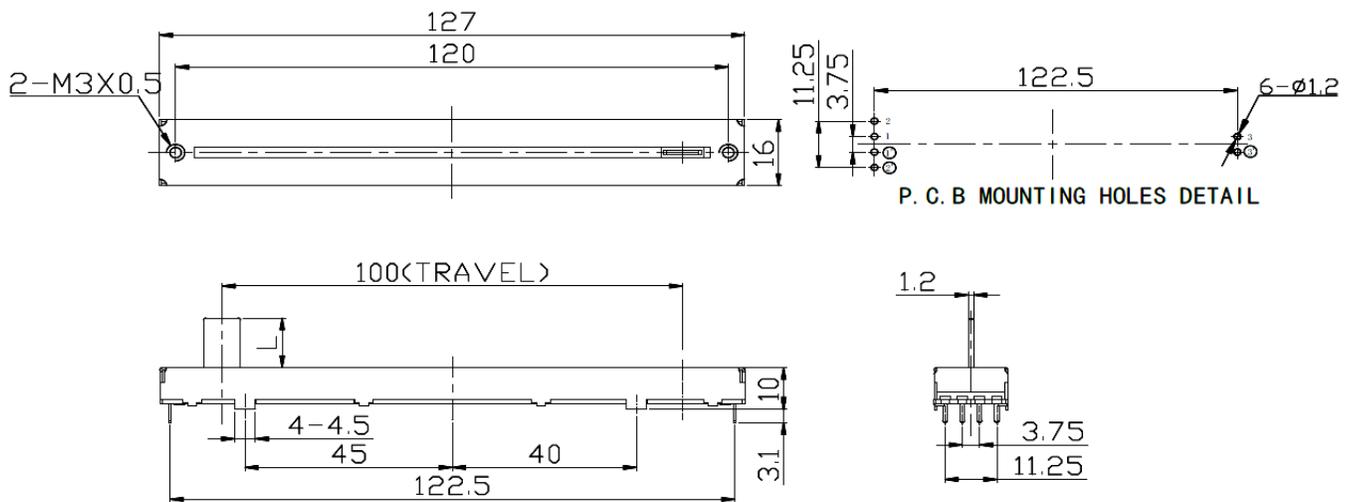

General Note  
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc


TT Electronics | BI Technologies  
 Circulo de la Amistad #102 PIMSA IV Mexicali B.C. Mexico C.P 21210  
 Ph: + 1 (714) 447-2345  
[www.ttelectronics.com/bi-technologies](http://www.ttelectronics.com/bi-technologies)

Rev - 06/2019 Page 7


Document #: \_\_\_\_\_

### Standard Tapers


TAPERS (A) SERIES

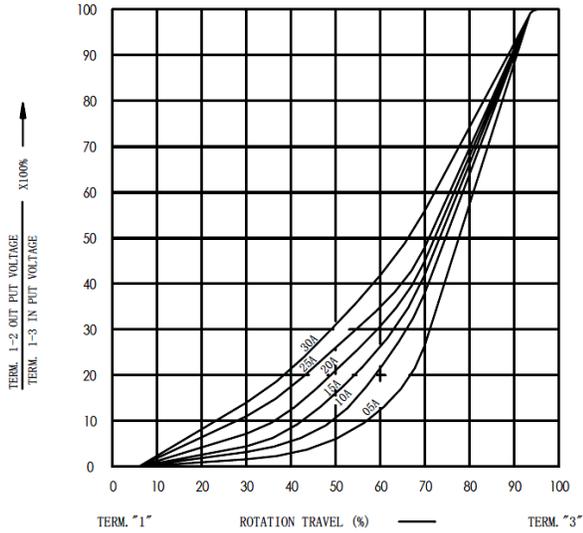

TAPERS (B) SERIES

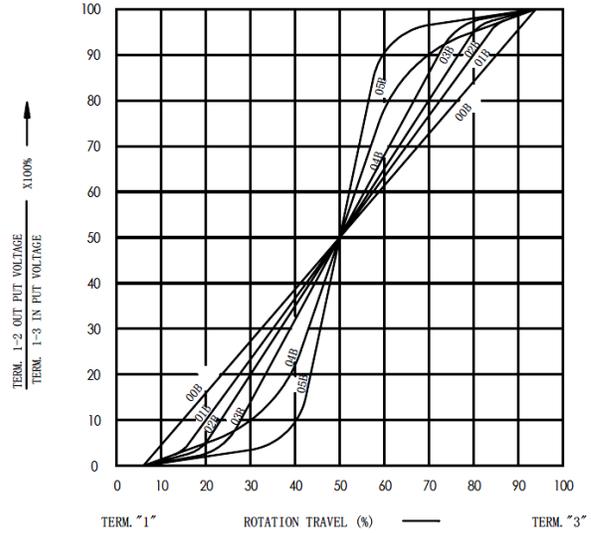

TAPERS (C) SERIES

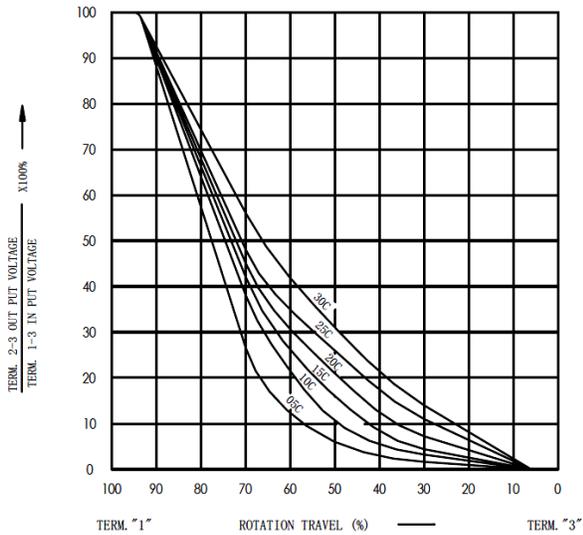

Resistance Taper Table (Code)		
Taper "A"	Taper "B"	Taper "C"
05A	00B	05C
10A	01B	10C
15A	02B	15C
20A	03B	20C
25A	04B	25C
30A	05B	30C

### Packaging

Standard Packaging	N/A
Included Hardware	None

General Note  
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies  
 Circulo de la Amistad #102 PIMSA IV Mexicali B.C. Mexico C.P 21210  
 Ph: + 1 (714) 447-2345  
[www.ttelectronics.com/bi-technologies](http://www.ttelectronics.com/bi-technologies)