


# Precision Ceramic Ball Grid Arrays

## CHC-Precision Series

**OBSOLETE**

### Features

- Ratio tolerances to  $\pm 0.05\%$
- Absolute tolerances to  $\pm 0.1\%$
- RoHS compliant terminations available
- Superior TaNFilm® resistors on ceramic substrate
- Same footprint as the industry standard SOIC-N package

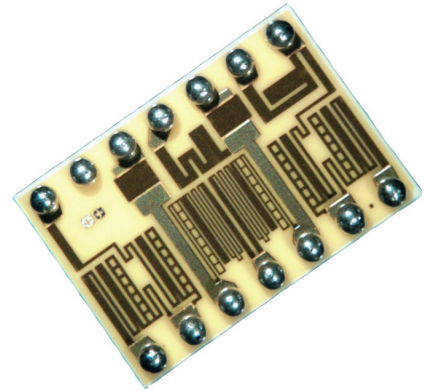

 All Pb-free parts comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

IRC's TaNFilm® ceramic Precision Ball Grid Array offers precision tolerances in a ceramic BGA package. In addition, the TaNFilm® CHC Series provides all the unique qualities of our other TaNFilm® package configurations.

Precise state-of-the-art laser trimming provides close tolerances and tight ratios. The TaNFilm® process enables IRC to manufacture custom circuit configurations and multiple resistance values without sacrificing the tightest tolerance and tracking characteristics of precision networks. The Tantalum Nitride resistor material is self-passivating for environmental protection surpassing military requirements and guaranteeing exceptional ratio stability.

For applications requiring a high degree of reliability, stability, accuracy and low noise, plus the advantages of new resistor configurations, specify the IRC Precision Ceramic Ball Grid Arrays.

## Electrical Data

Package	Power Rating at 70°C		Temperature Range	Maximum Voltage	Noise	Substrate	Termination
	Element	Network					
8-Pad	100mW	400mW	-55°C to +150°C	50V (not to exceed $\sqrt{PxR}$ )	< -25dB	99.5% Alumina	Solder plated over nickel barrier
16-Pad	100mW	800mW					

## Manufacturing Capabilities

Resistance Range	Available Absolute Tolerances	Available Ratio Tolerances (Ratio to R1)	Best Absolute TCR	Tracking TCR (Track to R1)
10Ω - 25Ω	J G F D C	G F D	$\pm 100\text{ppm}/^\circ\text{C}$	$\pm 20\text{ppm}/^\circ\text{C}$
25.1Ω - 50Ω	J G F D C	G F D C	$\pm 50\text{ppm}/^\circ\text{C}$	$\pm 10\text{ppm}/^\circ\text{C}$
50.1Ω - 200Ω	J G F D C B	G F D C B	$\pm 25\text{ppm}/^\circ\text{C}$	$\pm 5\text{ppm}/^\circ\text{C}$
201Ω - 100KΩ	J G F D C B	G F D C B A	$\pm 25\text{ppm}/^\circ\text{C}$	$\pm 5\text{ppm}/^\circ\text{C}$

### General Note


TT Electronics reserves the right to make changes in product specification without notice or liability.

All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies IRC Welwyn

[www.ttelectronics.com/resistors](http://www.ttelectronics.com/resistors)


Physical and Schematic Data

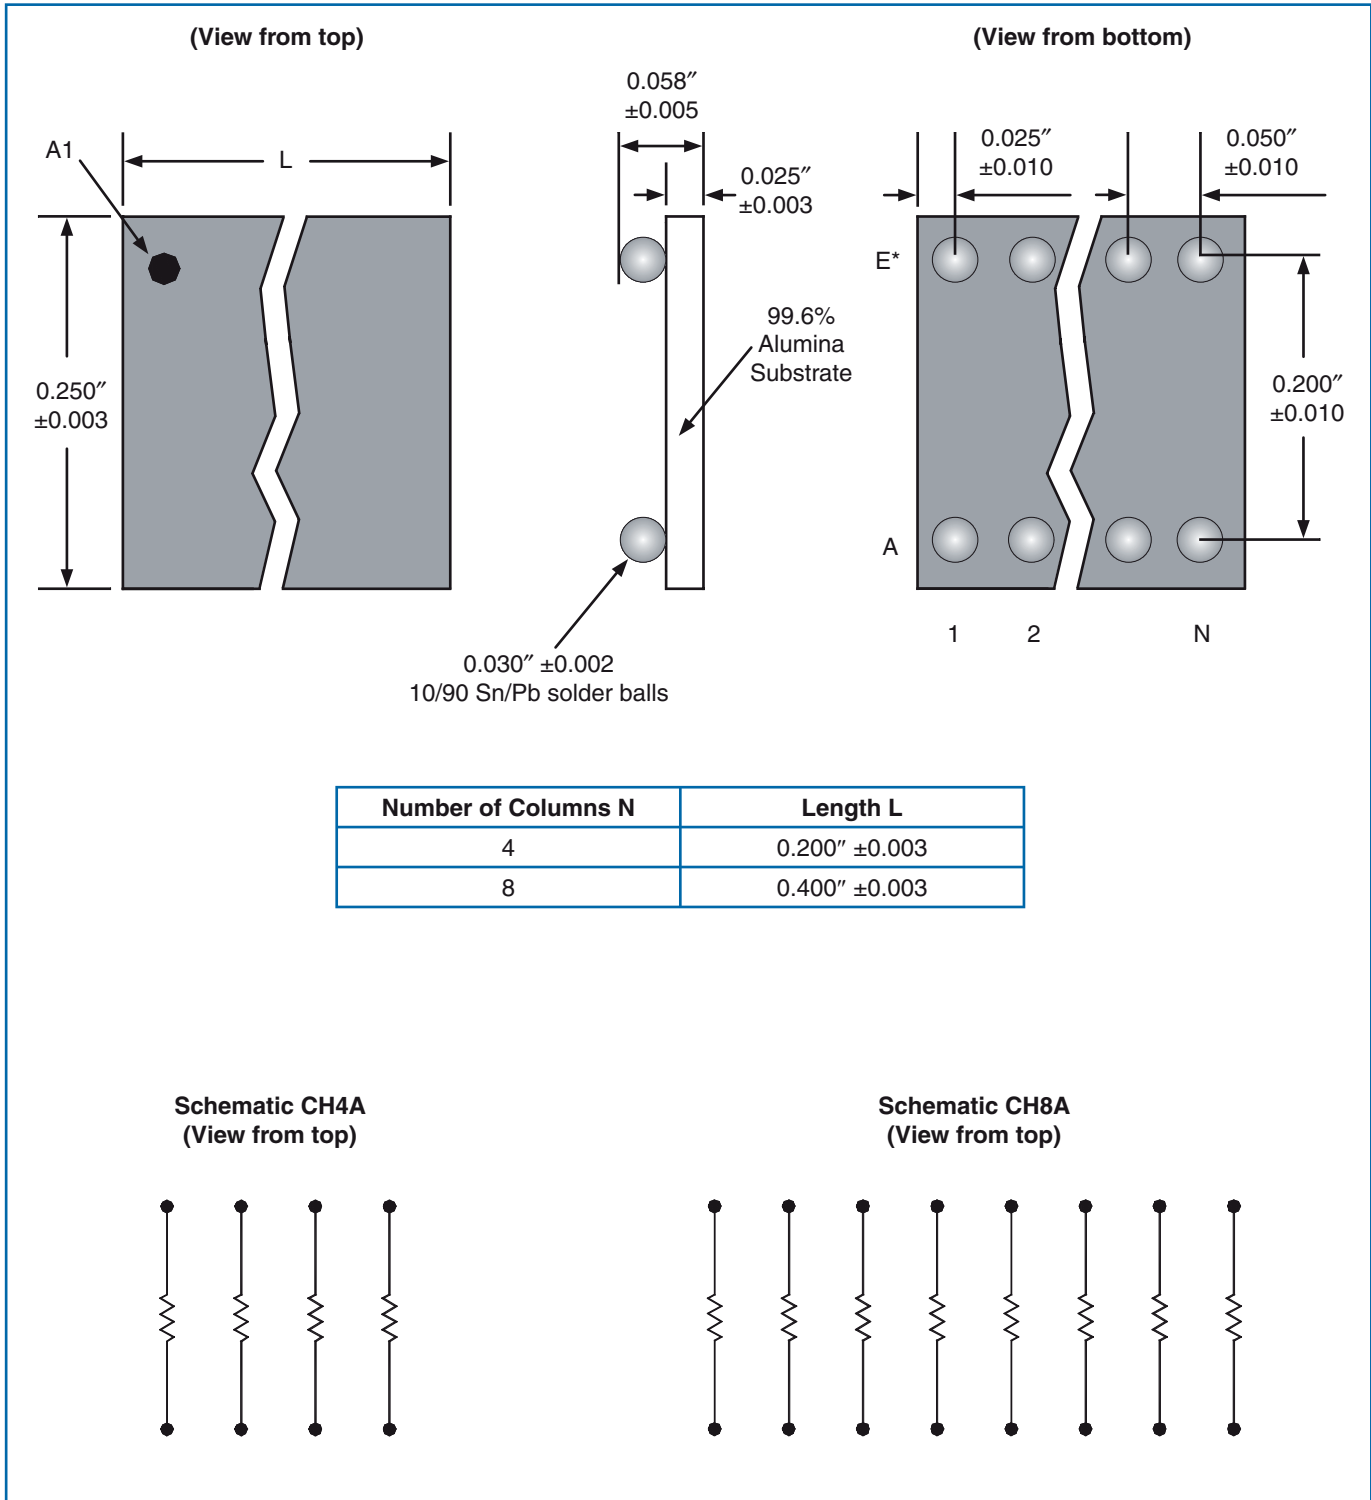

## Environmental Data

Environmental Test Per MIL-PRF-83401	Maximum $\Delta R$	Typical $\Delta R$
Thermal Shock And Power Conditioning	$\pm 0.1\%$	$\pm 0.02\%$
Low Temperature Operation	$\pm 0.05\%$	$\pm 0.02\%$
Short-time Overload	$\pm 0.05\%$	$\pm 0.02\%$
Moisture Resistance	$\pm 0.1\%$	$\pm 0.03\%$
Shock	$\pm 0.1\%$	$\pm 0.03\%$
Vibration	$\pm 0.1\%$	$\pm 0.03\%$
Life	$\pm 0.1\%$	$\pm 0.03\%$
High Temperature Exposure	$\pm 0.1\%$	$\pm 0.03\%$
Low Temperature Storage	$\pm 0.05\%$	$\pm 0.01\%$

## Power Derating Curve

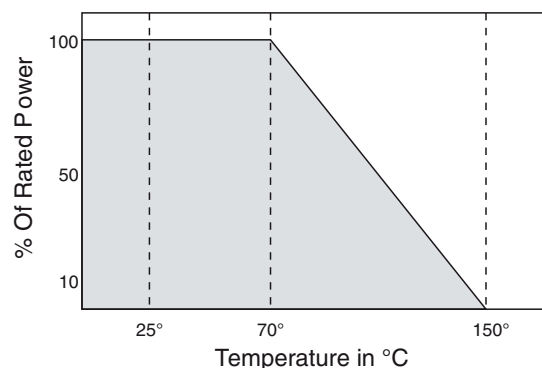

## Ordering Data

Prefix	CHC	-	CH8A	-	03	-	1002	-	B	B
Model	CH4A = 8-pad with 10/90 Sn/Pb terminations CH4ALF = 8-pad with RoHS compliant SnAgCu terminations CH8A = 16-pad with 10/90 Sn/Pb terminations CH8ALF = 16-pad with RoHS compliant SnAgCu terminations									
TCR Code	01 = $\pm 100$ ppm/°C Commercial Grade 02 = $\pm 50$ ppm/°C Commercial Grade 03 = $\pm 25$ ppm/°C Commercial Grade									
Resistor Code	4-digit resistance code Example: 1002 = 10K $\Omega$ ; 49R9 = 49.9 $\Omega$									
Absolute Tolerance Code	J = $\pm 5\%$ ; G = $\pm 2\%$ ; F = $\pm 1\%$ ; D = $\pm 0.5\%$ ; C = $\pm 0.25\%$ ; B = $\pm 0.1\%$									
Optional R1 Ratio Tolerance Code	F = $\pm 1\%$ ; D = $\pm 0.5\%$ ; B = $\pm 0.1\%$ ; A = $\pm 0.05\%$									

For additional information or to discuss your specific requirements, please contact our Applications Team using the contact details below.

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.  
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.