


Leadless Surface Mount Chip Resistor/ Capacitor Networks

RC Series **OBSOLETE (RC6 only)**

- Thick film on ceramic construction
- Low profile suitable for PCMCIA
- Low inductance leadless design
- Available in two popular sizes: 1206 & 2512
- Nickel barrier terminations
- High speed AC line termination
- EMI/RFI filtering
- Enhanced parallel port (IEEE 1284)

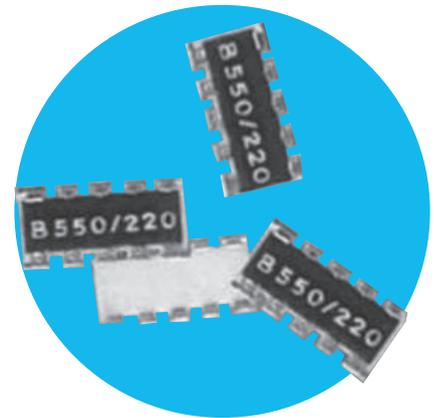

All Pb-free parts comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

Electrical

Standard Resistance Range, Ohms	20 to 1Meg					
Resistance Tolerance	±20% (M Tol.) Optional: ±10% (K Tol.), ±5% (J Tol.)					
Temperature Coefficient of Resistance	±200ppm/°C					
Power Rating, Watts	RC4: 63mW per Resistor 63mW per Package			RC6: 63mW per Resistor 250mW per Package		
Capacitance, Maximum, pF	RC4:	RC6A:	RC6B:	RC6C:	RC6D:	RC6E:
	200	220	68	68	220	180
Capacitor Characteristic	X7R					
Capacitor Tolerance	±20% at 1MHz, 25°C					
Capacitor Voltage Rating	25 Vdc					
Capacitor, Maximum, ΔC, -55°C to +125°C	±15%					
Capacitor Dissipation Factor	2.5% Max.					
Capacitor Dielectric Withstanding Voltage	125Vdc, 5 sec. 50mA Charge					
Capacitor Insulation Resistance	≥10,000 Megohms					
Operating Temperature Range	0-40°C to +125°C					

Specifications subject to change without notice.

Environmental


Solderability	MIL-STD-202, Method 208, Cond. B, 95% Coverage
Life	1,000 hours at 70°C (±3%+0.2 Ohms ΔR, ±10% ΔC)
Thermal Shock	MIL-STD-202F, Method 107, Cond. A (±3%+0.2 Ohms ΔR, ±10% ΔC)
Moisture Resistance	MIL-STD-202F, Method 106 (±3%+0.2 Ohms ΔR, ±10% ΔC)

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

RC Series **OBSOLETE (RC6 only)**

Schematics

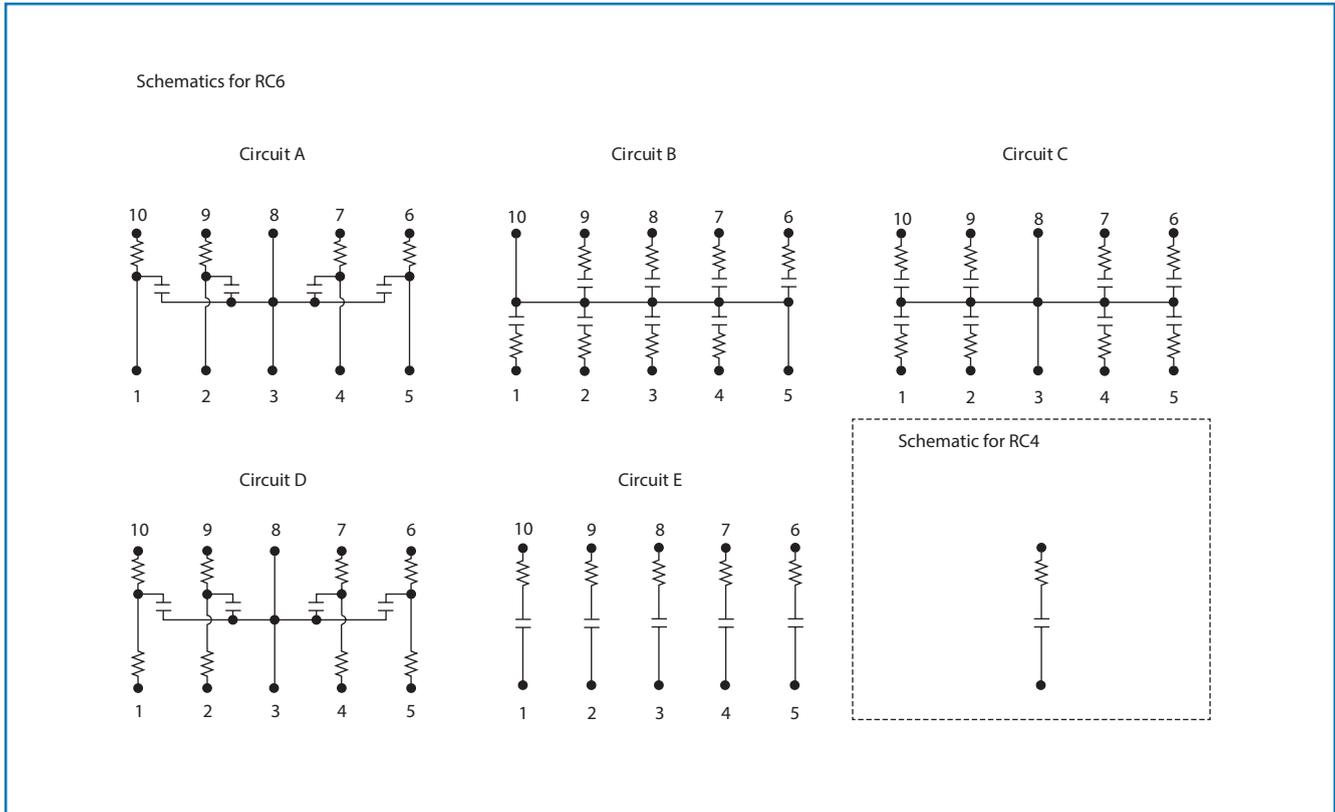

Construction


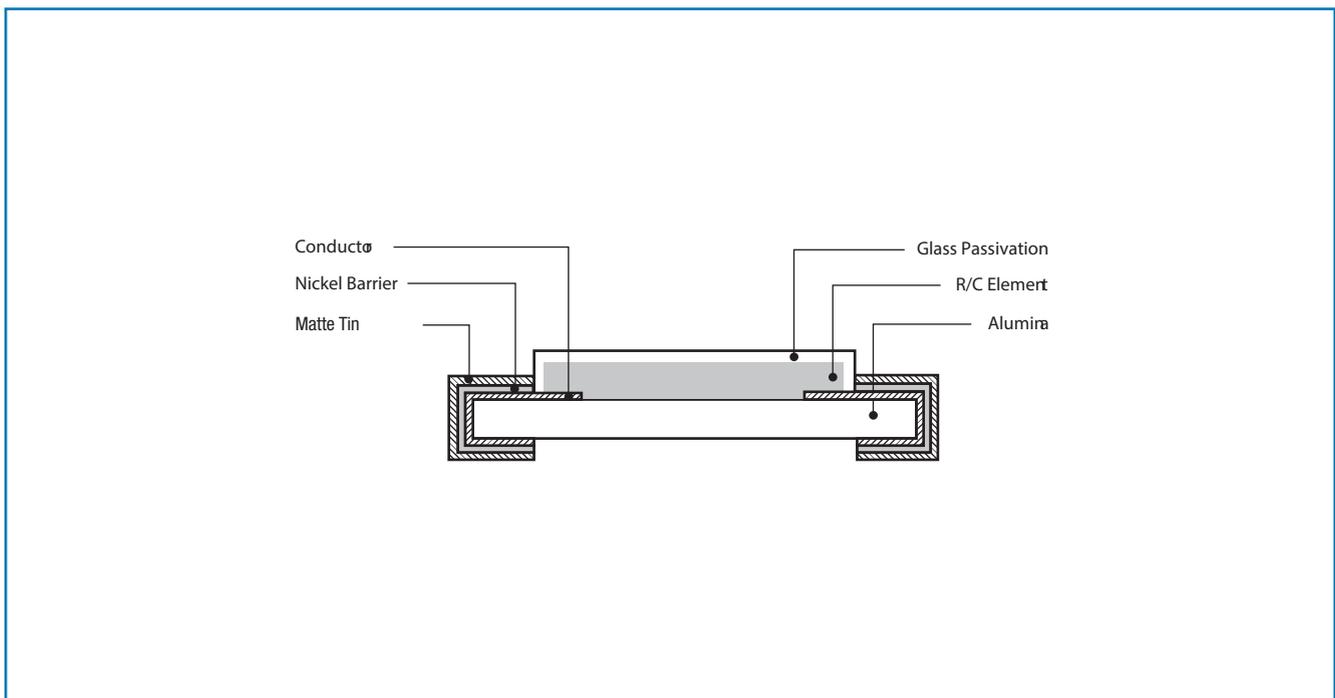


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

RC Series **OBSOLETE (RC6 only)**

Outline Dimensions (Inch/mm)

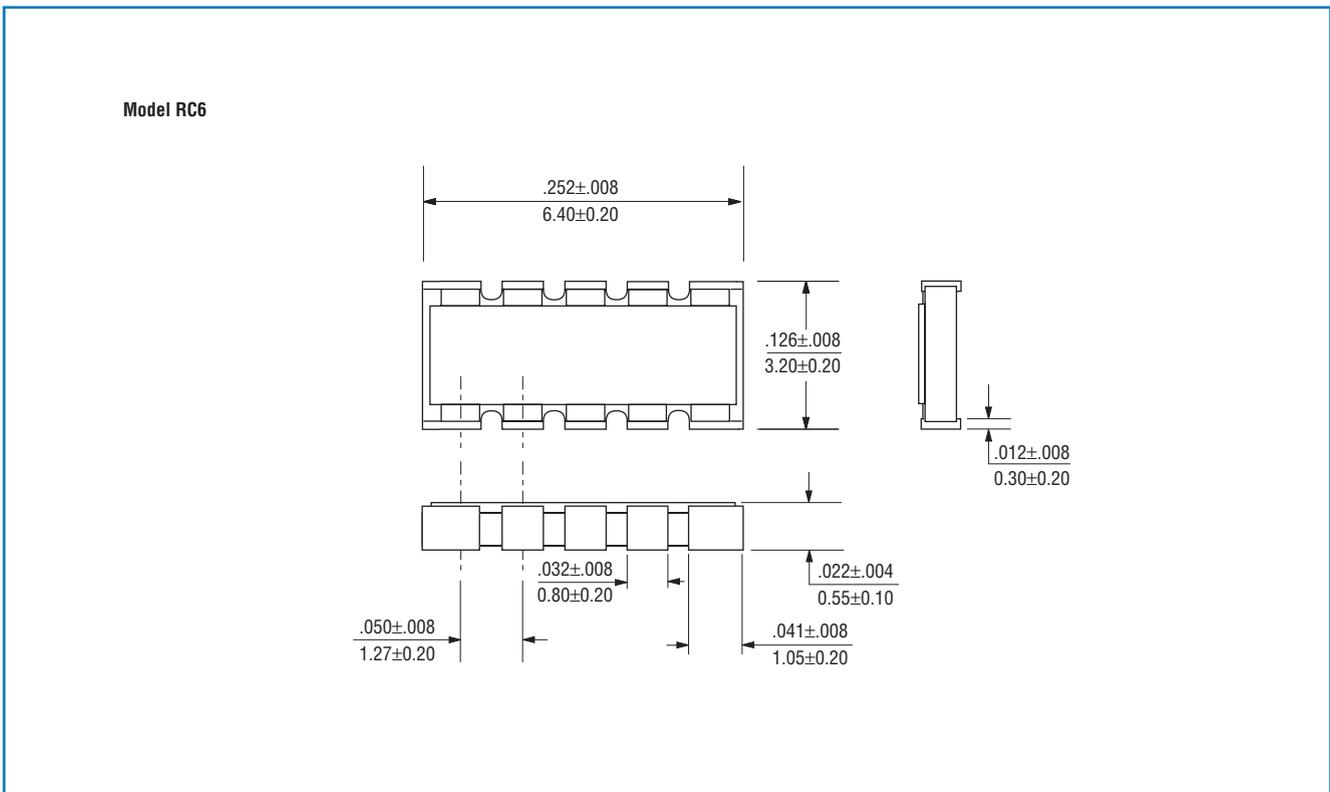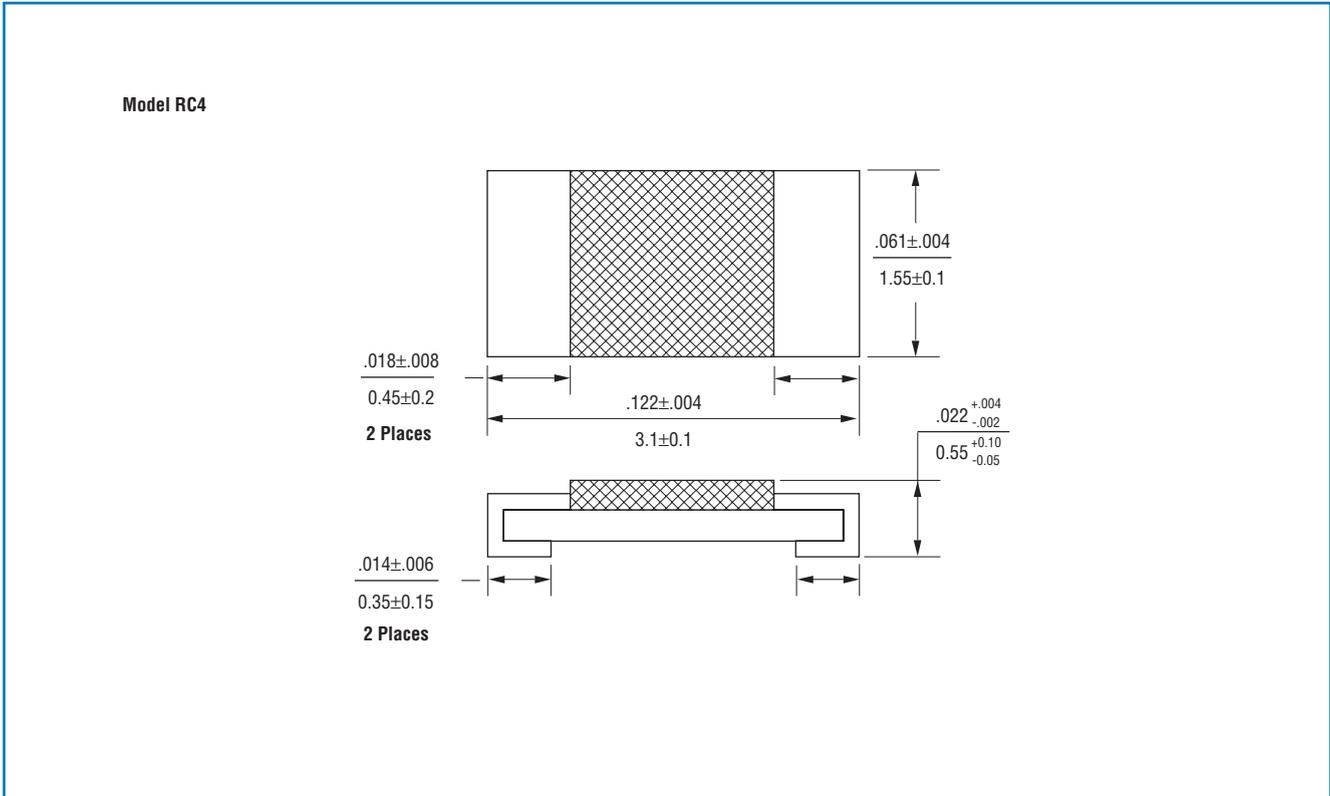


General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

RC Series **OBSOLETE (RC6 only)**

Packaging (Inch / mm)

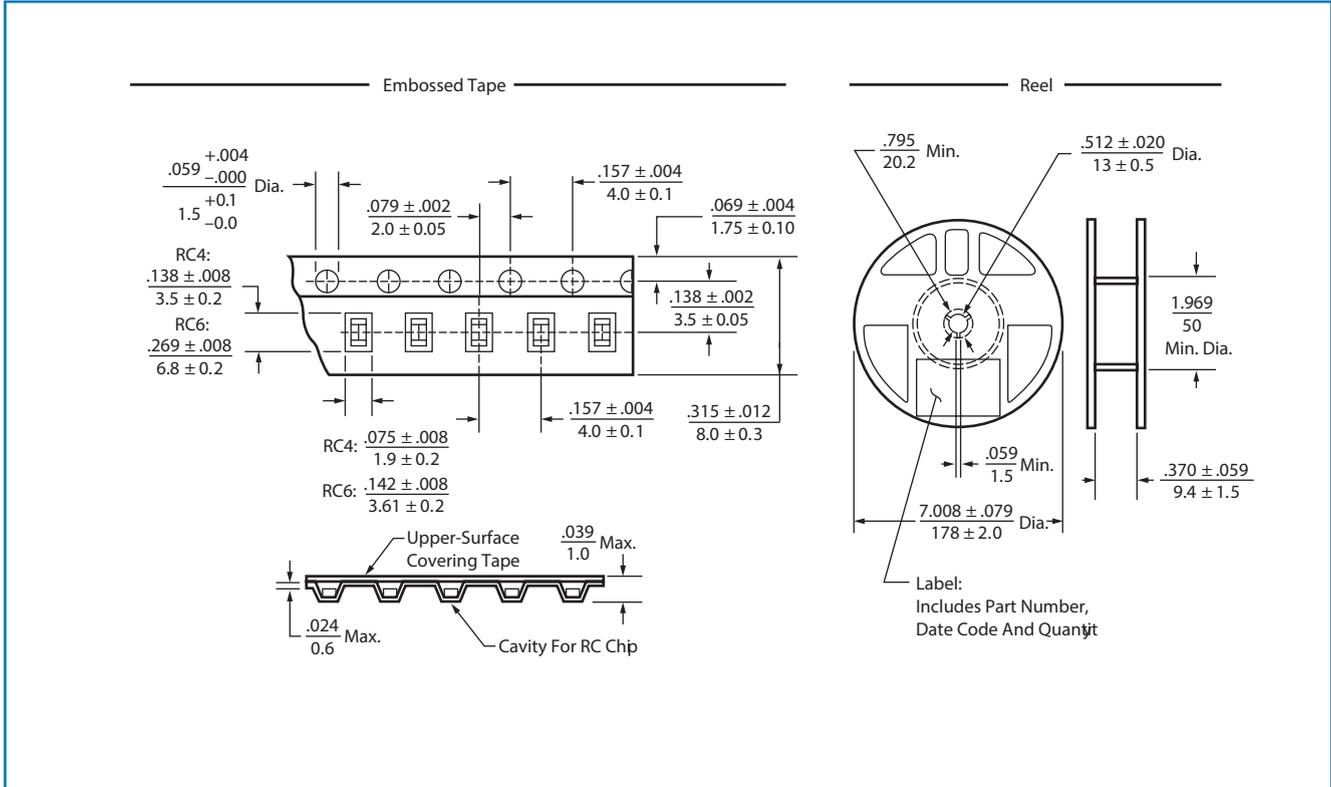

Ordering Information

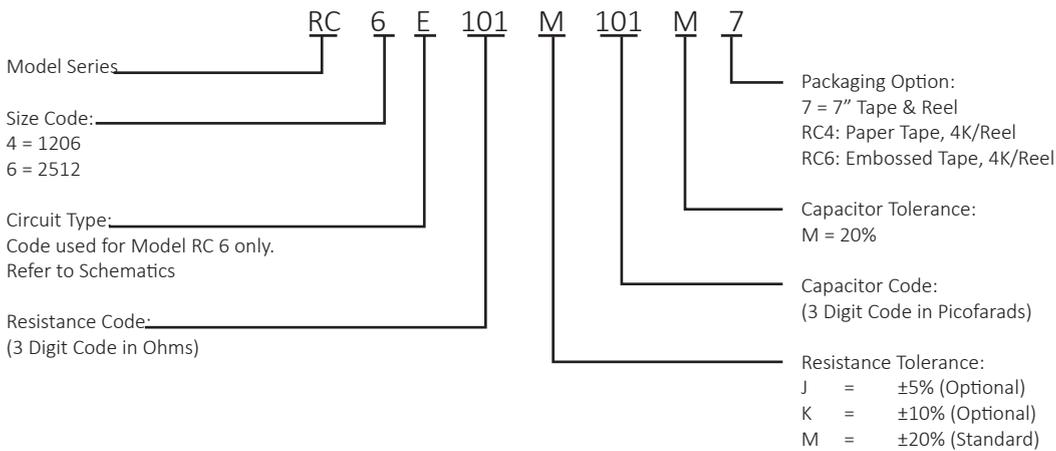

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.