


Wire Bondable Chip Resistors

WBC Series

- Discrete or tapped schematics
- MIL inspection available
- High resistor density

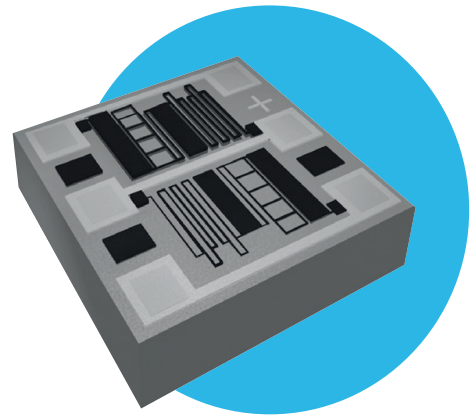


 All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

The WBC combines IRC's TaNSil® tantalum nitride thin film technology with silicon substrate processing to produce an extremely small tantalum nitride thin film technology with silicon substrate processing to produce an extremely small footprint device with the proven stability, reliability and moisture performance of IRC's TaNSil® resistor film.


Available in a wide range of tolerances and temperature coefficients to fit a variety of hybrid circuit applications. Custom resistance values, sizes and schematics are available on request from the factory.

Physical Data


R0202 - Discrete

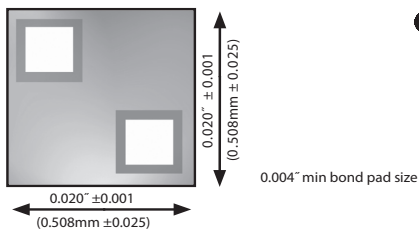

B0202 - Discrete back contact¹

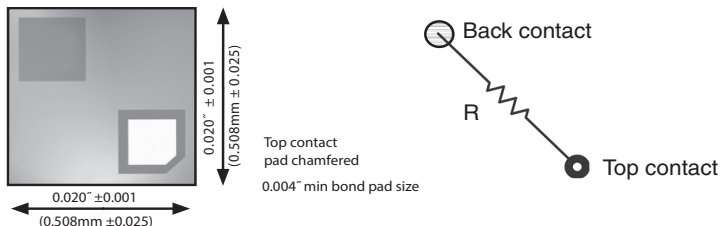

T0303 - Tapped network $\frac{1}{2}R + \frac{1}{2}R$

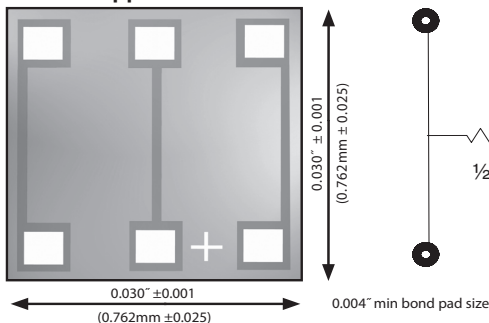

Electrical Data


Absolute Tolerance	to $\pm 0.1\%$	
Absolute TCR	to $\pm 25\text{ppm}/^\circ\text{C}$	
Package Power Rating (@ 70°C)	250mW	
Rated Operating Voltage (not to exceed $\sqrt{P \times R}$)	100V	
Operating Temperature	-55°C to $+150^\circ\text{C}$	
Noise	$< -30\text{dB}$	
Substrate Material	Oxidized Silicon (10KÅ SiO ₂ min)	
Substrate Thickness	0.010" ± 0.001 (0.254mm ± 0.025)	
Bond Pad Metallization	Aluminum	10KÅ minimum
	Gold ¹	15KÅ minimum
Backside	R0202 and T0303	Silicon (Al / Au optional)
	B0202 ¹	3KÅ Au minimum 10KÅ Al minimum
Passivation	Silicon Dioxide or Silicon Nitride	

Note 1: Not recommended for new designs

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Power Derating Data

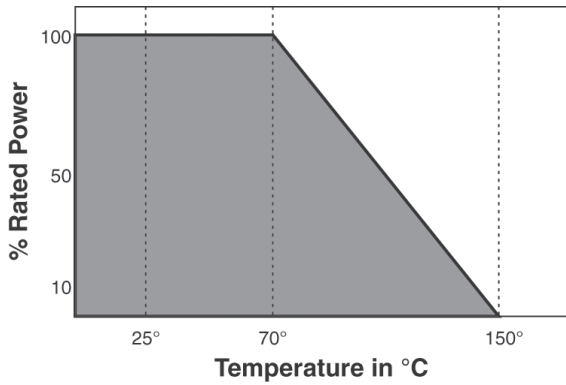

TCR/Inspection Code Table

Absolute TCR	Commercial Code	MIL Inspection Code*
±300ppm/°C	00	04
±100ppm/°C	01	05
±50ppm/°C	02	06
±25ppm/°C	03	07

*Notes: Product supplied to Class H of MIL-PRF 38534 includes 100% visual inspection

Manufacturing Capabilities Data

Resistance Range	Package	Available Abs Tolerances	Available Ratio Tol (T0303 only)	Best Absolute TCR	Tracking TCR (T0303 only)
10Ω - 20Ω	0202 only	G J K	N/A	+100ppm/C	N/A
21Ω - 50Ω	0202 and 0303	F G J K	F G J	+100ppm/C	+50ppm/C
51Ω - 100Ω	0202 and 0303	C D F G J K	C D F G J	+100ppm/C	+25ppm/C
101Ω - 200Ω	0202 and 0303	C D F G J K	C D F G J	+50ppm/C	+10ppm/C
201Ω - 500Ω	0202 and 0303	B C D F G J K	B C D F G J	+50ppm/C	+5ppm/C
501Ω - 999Ω	0202 and 0303	B C D F G J K	B C D F G J	+25ppm/C	+2ppm/C
1.0KΩ - 400KΩ	0202 and 0303	B C D F G J K	A B C D F G J	+25ppm/C	+2ppm/C
401KΩ - 800KΩ	0303 only	B C D F G J K	A B C D F G J	+25ppm/C	+2ppm/C

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

WBC Series

Environmental Data

Test	Method	Max R	Typical R
Thermal Shock	MIL-STD-202 Method 107 Test condition F	±0.1%	±0.02%
High Temperature Exposure	MIL-STD-883 Method 1008 150°C, 1000 hours	±0.1%	±0.05%
Low Temperature Storage	-55°C, 1000 hours	±0.03%	±0.01%
Life	MIL-STD-202 Method 108 70°C, 1000 hours	±0.5%	±0.01%
Life at Elevated Temperature	MIL-STD-202 Method 108 125°C, 1000 hours	±0.5%	±0.05%

Ordering Data

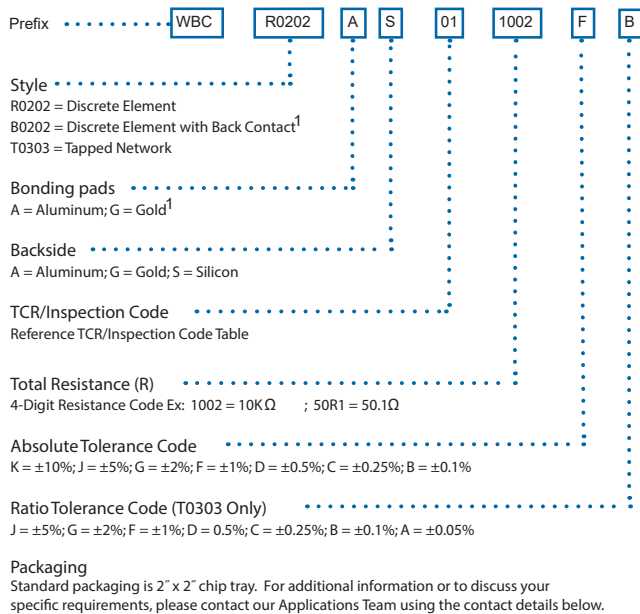

Note 1: Not recommended for new designs

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.