


HIGH FREQUENCY POWER

019-6027-04RT

Features

- Small Foot Print, Surface Mount
- Tape and Reel
- RoHS Compliant

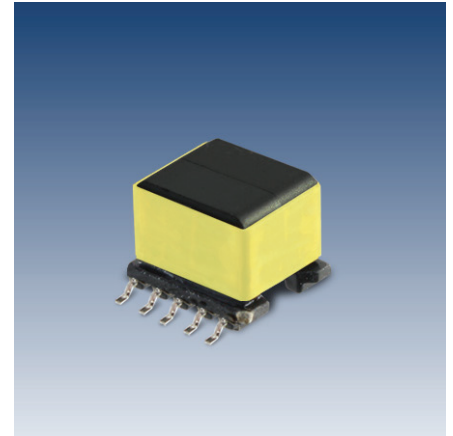





ELECTRICAL SPECIFICATIONS @ 25°C UNLESS NOTED OTHERWISE

Parameters	Value	Notes
Inductance (mH)	0.880 -1.07	2 - 1 @ 0.1V, 100kHz
Leakage Inductance (µH)	35 Max	2 - 1 tie 6 + 7 + 9 + 10 @ 0.1V, 100kHz
DC Resistance (Ω) @ 20°C	1.2 Max	1 - 2
DC Resistance (Ω) @ 20°C	0.010 Max	10, 9 - 7, 6
Dielectric (Vac)	500	(1, 2) - (10, 9, 7, 6) @ 60Hz, 1s

PHYSICAL DIMENSIONS

Mechanicals

Schematics

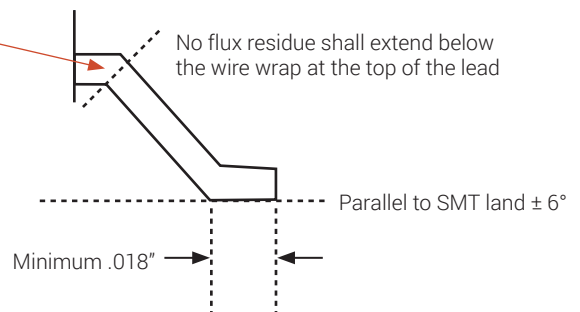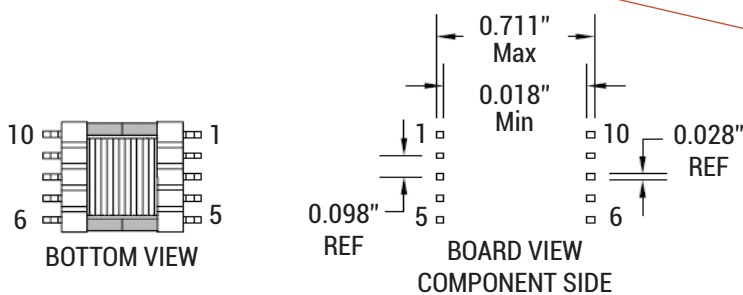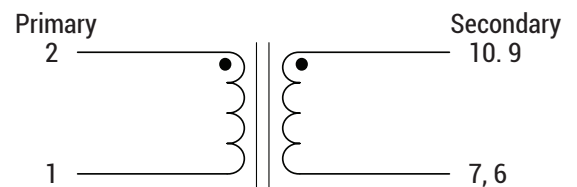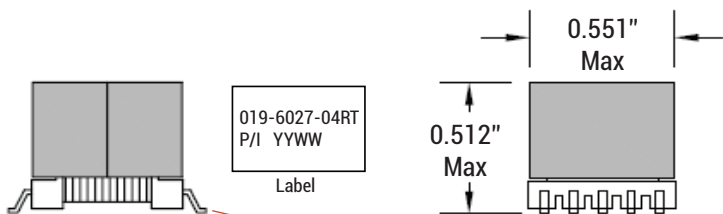

- Specifications subject to change without notice.
- Label shown is only for illustrative purposes only.