#### **Resistors**


## **Till** Electronics

# **General Purpose Axial Leaded Power Wirewound Resistor**

#### **PW Axial Series**

#### **OBSOLETE**

- 0.10Ω to 30ΚΩ
- 3 watts to 25 watts
- ±10% or ±5% tolerance
- TC's from 300 ppm/°C to +5500 ppm/°C
- Lead free, RoHS compliant construction available



All Pb-free parts comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

#### :al Dataical Data


			Chandan	4					
Po	ower <del>R</del> ating	REGISIAN	CP Dange	tancStandard Temperature tancStandard Temperature tancStandard Temperature tancStandard Temperature tancStandard Temperature		Special Te	ficients		
	@ 25°C	(watts) Range							
	(watte)	naliye	(55)	0.0∰%/்டுrange		over Rogange/	over R range	475 % Cange	
	PW-3	0 15 to 2	0.1 to 7.5 4K 0	K 0.1 to 0.99 15 to 0.99	1.0 to 7.5K 1.0 to 2.4K	0.1 to 86	0.1 to 270 30 <sub>0.1 to 30</sub> 0.2	0.24 to 20 4 to 130	
	₽W-5	-			110 10 01011				
	₽W-7	0.† to 7.			1.0.d@7&K		36 <sub>0.15 to 68</sub> 0.1	to <sub>1</sub> 22760 <sub>51</sub>	
	<b>₽</b> W-10	0. <sup>10</sup> to 8. <i>!</i>	_	K <sub>1</sub> 0018 50 0.99	1.09895K		ട്ട <b>ര</b> .24 to 110 <b>ര</b>	to <sup>1</sup> .	
	PW-15	0.1 to 18	0.18 to 30	0.18 to 0.99	1.0 to 30K 1.0 to 18K 1.0 to 22K	0.1 to 240	50.24 to 1100 0.24 to 1100	1.0 to 82	
	PW-18	18	0.18 to 22						
	120V-22	0. <u>≱</u> 8 to 3	OK <sub>0.27 to</sub> Qe	ik8 to <u>oQ.</u> 98 1.3	1.0₅to 3 <u>0</u> K	0.15 <b>%</b> Beto 2	40,36 to 180624	tq.d.tb00 <u>0</u> 0	
	PW-25	0. <del>18</del> to 3	OK <sup>0.27 to</sup> ₫	<sup>8</sup> 48 to <sup>0</sup> 6.7949 <sup>1.3</sup>	1.05t8 38K	<sup>0.15</sup> ტ. 1 <sup>0</sup> 0.2	40 <sup>36 to 1</sup> 2024	td.¶ <sup>t</sup> Pd@0	
	Physical Data								
	Standard Co	Standard Configuration 18K 0.27 to 1.3 1.5 to 12K configuration 360 0.36 to 1800							
	25	0.27 to 18		.27 to 1.3	1.5 to 1011	^ <u> </u>			
	20	0.27 10 10	0.125"	Max. w -	1.5 (	//	7/	Е -	
call	<b>屮</b> ≔====	₹		0   1	1	1	7	1	
					F_	<u> </u>		· -	
Configuration Alternate Configuration									
	Туре	L ±0.03 (0.8)	W ±0.03 (0	0.8) H ±0.03 (0.8	D Dia. ±0.002 (0.05)	E ±0.03 (0.8)	LL min.	F (ref.)	
	PW-3	0.88 (22.4)	_0.31 (7.8		0.036 (0.91)	0.38 (9.65)	1.44 (36.6)	0.063 (1.6)	
	PW-5	0.88 (22.4)	10.38 (9.6	5) 0.35 ( <del>8.89</del> )	0.036 (0.91)	0.41 (10.4)	1.50 (38.1)	0.063 (1.6)	
(	PW-7	1.39 <b>((</b> B5.3)	0.38 (9.6	5) 0.35 (8 <del>.1</del> 89)	0.036 (0.91)	0 47 (11.9)	1.50 (38.1)	0.125 (3.18)	
	PW-10	1.88 (47.8)	<sup>†</sup> 0.38 (9.6	5) 0.35 ( <del>8.89</del> )	0.036 (0.91)	0 47 (11.9)	1.50 (38.1)	0.125 (3.18)	
	PW-15	1.88 (47.8)	0.50 (12.	7) 0.50 (12.7)	0.036 (0.91)	<u>0.63</u> (16.0)	1.50 (38.1)	0.125 (3.18)	
	PW-18	1.88 (47.8)	0.50 (12.	7) 0.50 (12.7)	0.036 (0.91)	0.63 (16.0)	1.50 (38.1)	0.125 (3.18)	
	PW-22	2.50 (63.5)	0.50 (12.	7) 0.50 (12.7)	0.040 (1.0)*	0.63 (16.0)	1.50 (38.1)	0.125 (3.18)	
L	±0. <b>0%/(3.8)</b>	<b>₩0∓0303 (</b>	0.8)50 (121	7 <b>±0 03 (0.8)</b> .7	D Dia. 9-000020(0.0	5) 0.68 <b>40.03</b>	<b>(0.18)</b> 0 (38.1) <b>L</b>	L0 <b>m2in</b> (3.18)	
	Copper Clad Steel	0 25 /6 3	25) (	) 25 (6 25)	U U33 (U 8)	N Q1 /7	Ω7\ 1/	14 (26 6)	

**PW Axial Series** 




#### OBSOLETE

### Temperature Rise Chart

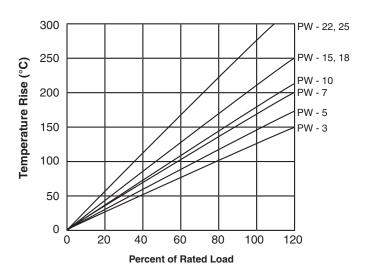

#### **Power Derating Curve**

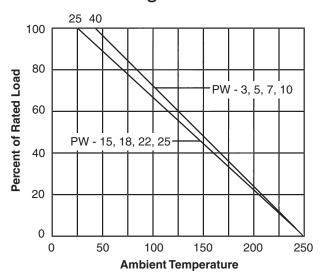

#### **Ordering Procedure**


This product has two valid part numbers:

European (Welwyn) Part Number: PW15-12KKI (PW15, 12 kilohms ±10%, Pb-free)



1	2	3	4	5	
Туре	Configuration	Value	Tolerance	Packing & Termination Finish	
PW3	Omit for Standard	R = ohms	J = ±5%	I = Standard packing & Pb-free	
PW5, PW7,	A = Alternate	K = kilohms	$K = \pm 10\%$	Bulk pack	
PW10, PW15,					
PW18, PW22,					
PW25					

USA (IRC) Part Number: PW151202KLF (PW15, 12 kilohms ±10%, Pb-free)



1	2	3	4	5	
Туре	Configuration	Value	Tolerance	Packing & Termination Finish	
PW3	Omit for Standard	3 digits + multiplier	J = ±5%	Omit for SnPb	
PW5, PW7,	A = Alternate	R = ohms for values	$K = \pm 10\%$	LF = Pb-free	
PW10, PW15,		<100 ohms		Bulk pack	
PW18, PW22,			ı		
P\N/25					