


AS055

LCR014

- Rogowski Sensor Integrator and Amplifier
- Compatible with LCR011 Rogowski Coil Sensor
- Power supply 6V to 16V
- Amplified current signal output, $\pm 2V$ differential
- Dual output. For example one channel can be 600A normal current and the second channel 2000A transient.
- Bandwidth 50Hz to 36kHz
- Factory calibration of scale and offset
- Temperature, ambient range -55 to 125°C
- PCB dimensions 38x44mm. Height depends on connector requirements

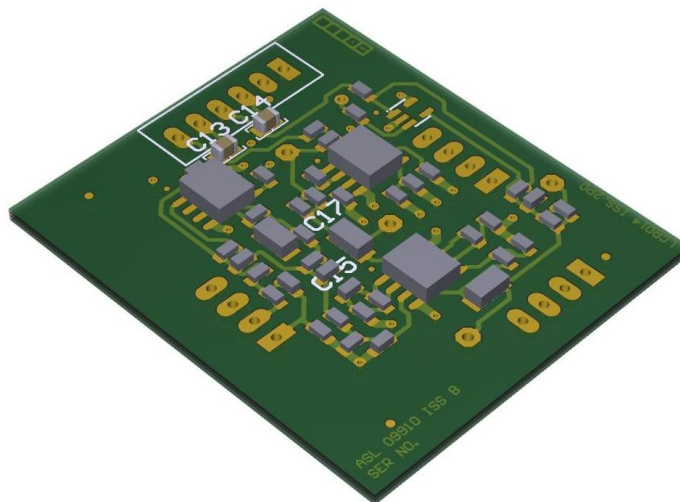

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT Electronics plc

TT Electronics | Aero Stanrew Limited
Gratton Way, Roundswell Business Park, Barnstaple, EX31 3AR, UK | Ph: +44 (0) 1271 341300
www.ttelectronics.com | barnstaple.quotes@ttelectronics.com

Classification: Public

22/05/2019 Rev A Page 8