


## EBW8518

### Features

- Electron-beam welded technology
- Low thermal EMF
- Low measurement inductance
- Robust copper terminals for busbar mounting
- AEC-Q200 qualified

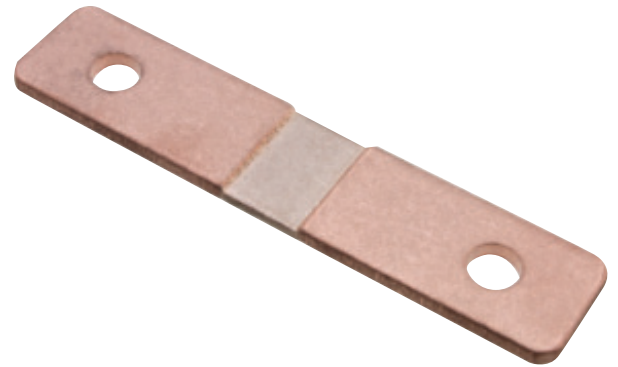

All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

## Electrical Data

		EBW8518		
Power rating at 70°C	W	36		
Resistance range	$\mu\Omega$	50 to 250		
Resistance tolerance	%	50 $\mu\Omega$ : $\pm 3, \pm 5$	100 $\mu\Omega$ : $\pm 2, \pm 5$	>100 $\mu\Omega$ : $\pm 1, \pm 5$
TCR (resistive alloy)	ppm/°C	$\pm 10$		
TCR (measurement)	ppm/°C	50 $\mu\Omega$ : $\pm 150$	>50 $\mu\Omega$ : $\pm 100$	
Standard values	$\mu\Omega$	50, 100, 125, 200, 250		
Thermal EMF	$\mu V/^\circ C$	<1		
Inductance (measurement)	nH	<5		
Ambient temperature range	°C	-65 to +170		

## Physical Data

 Dimensions in mm and weight in g

Resistance Value ( $\mu\Omega$ )	A nom.	B $\pm 0.2$	C $\pm 0.2$	Wt nom.
50	4.6	7.7	2.2	40.2
100	9.1	12.2	2.2	39.5
125	10.5	13.5	2.0	39.0
200	16.5	19.7	2.0	38.0
250	21.0	24.2	2.0	37.2

### Construction

A manganese alloy resistance element is e-beam welded between two copper terminations.

### Marking

The components are unmarked.

### Plating

The component can be supplied with or without Sn plating.


#### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

### Performance Data

Test	Method	±ΔR% max.
Load Life	1000 hours, cyclic load at Pr	1.0
Short Term Overload	5 seconds, 5 x Pr	1.0
High Temperature Exposure	1000 hours, +170°C	1.0
Temperature Cycle	1000 cycles, -55 to +150°C, 30 minute dwell	0.5
Low Temperature Storage	24 hours, -65°C	0.5
Biased Humidity	1000 hours, +85°C, 85%RH, 10% of Pr	0.5
Moisture Resistance	MIL-STD-202 Method 106, no load	0.5
Vibration	MIL-STD-202 Method 204, 5g for 20 mins, 12 cycles, 10-2000Hz	0.2
Mechanical Shock	MIL-STD-202 Method 213, 100g for 6ms, half sine	0.2
Resistance to Solder Heat	MIL-STD-202 Method 210, solder dip 260°C for 10s	0.5
Solderability	J-STD-002	95% coverage

### Thermal Performance

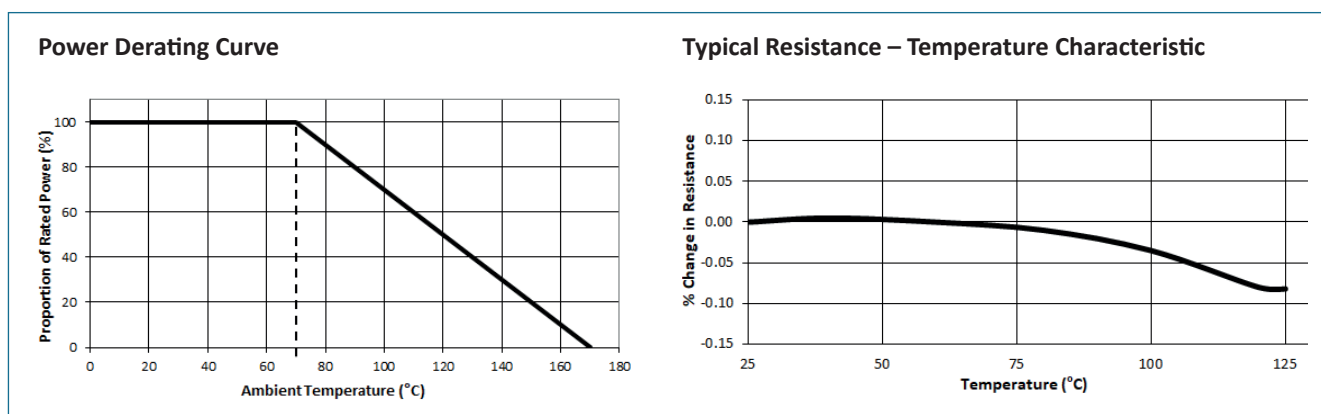

### Voltage Sense Terminal Style

Voltage sense terminal styles listed as Standard are available to order. Those marked Custom are examples of options which can be made available on request but may incur tooling charges.


Voltage Sense Terminal Option	Style	Figure	Availability
No sense terminals	NT		Standard
Through hole Ø3.2mm	T2	1	Custom
Tapped hole M3 x 0.5	M3	2	
Tapped hole M4 x 0.7	M4	3	
“With dimple” location points	WD	4	
Dowel fit pins	DF	5	Standard
Pressed pins	PP	6	
Stress-relief pins	SP		

#### General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics’ own data and is considered accurate at time of going to print.

## Voltage Sense Terminal Style


**Figure 1 – Through Hole (T2 Style)**

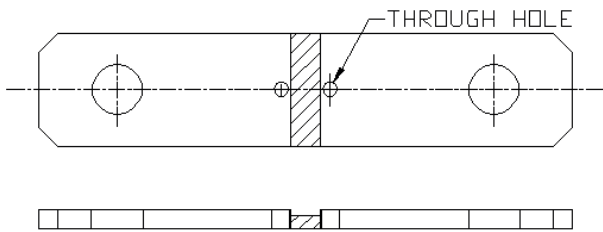


**Figure 2 – Tapped Hole (M3 & M4 Style)**

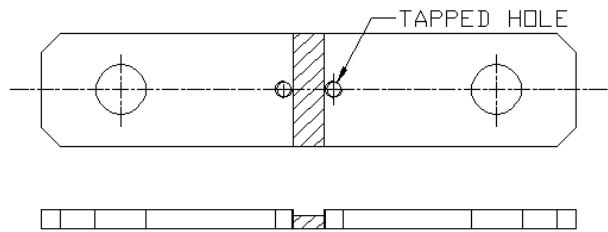


**Figure 3 – With Dimple (WD Style)**

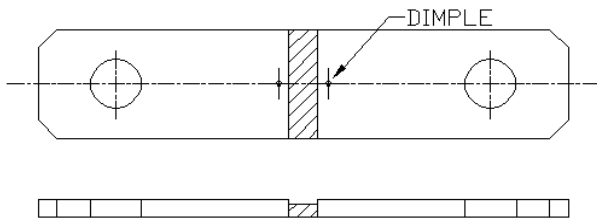


**Figure 4 – Dowel Fit Pin (DF Style)**

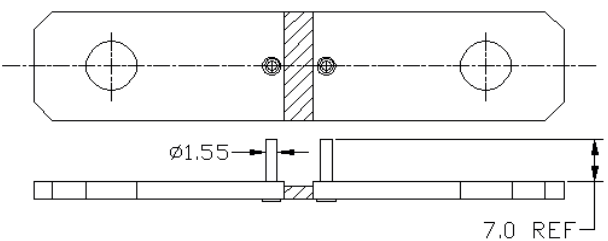


**Figure 5 – Pressed Pin (PP Style)**

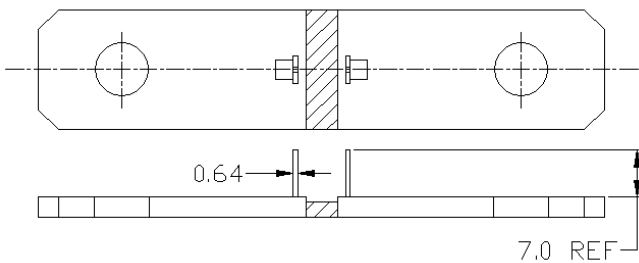


**PP Style Pin Detail**

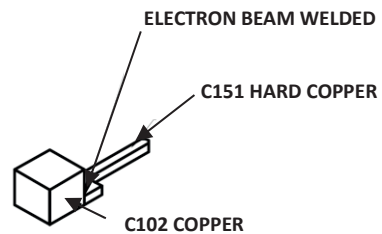

**Figure 6 – Stress-relief Pin (SP Style)**

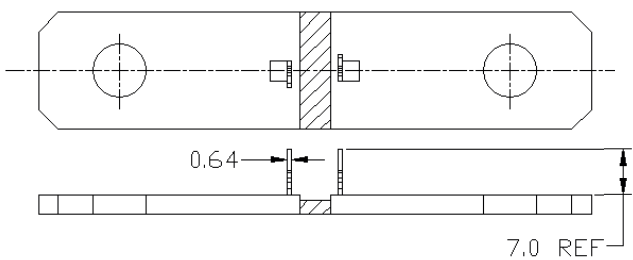

**SP Style Pin Detail**

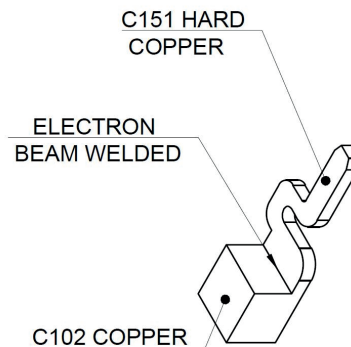

**General Note**

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

## EBW8518

### Packaging

Unplated EBW8518 shunts without voltage sense pins are supplied bulk packed in vacuum sealed plastic bags of 100 pieces. Plated parts without voltage sense pins may also be supplied in bulk but tray pack is standard. Parts with voltage sense terminal pins are tray packed.

#### Recommended Storage Conditions (packed):

Temperature 25°C to 35°C, humidity 30 to 80% RH.

### Ordering Procedure

**Example: EBW8518PNT-L050JT** (50 micro-ohms ±5%, plated, no sense terminals, tray packed, Pb-free)

E	B	W	8	5	1	8	P	N	T	-	L	0	5	0	J	T
1	2		3	4	5			6	7							

1	2	3	4	5	6		7		
Type	Size	Finish	Sense Style	Value	Tolerance		Packaging		
EBW	8518	P = Sn Plated	NT = No terminals	L050 = 50μΩ	F = ±1%	(>100μΩ only)	Un-plated	NT, T2, M3, M4, WD	B = Bulk
		U = Un-plated	PP = Pressed pins	L100 = 100μΩ	G = ±2%	(100μΩ only)			Plated
			SP = Stress-relief pin	L125 = 125μΩ	H = ±3%	(50μΩ only)			
			Request availability of custom styles	L200 = 200μΩ	J = ±5%	All values	Either finish		DF, PP, SP
				L250 = 250μΩ					

#### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.